


AlterMundus

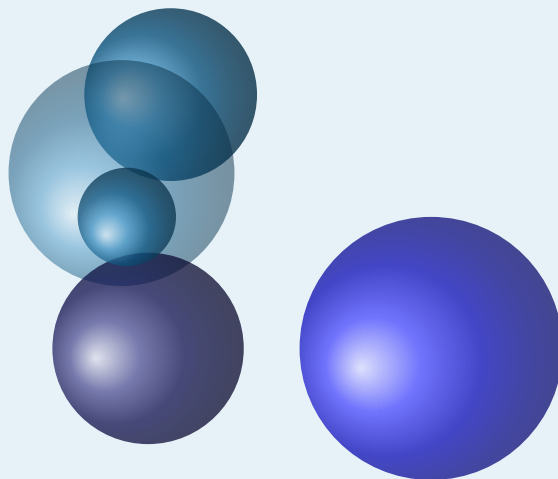

Alain Matthes

July 15, 2022 Documentation V4.2c

<http://altermundus.fr>

tkz-base

AlterMundus

Alain Matthes

`tkz-base` is a package based on TikZ to make graphics as simple as possible. It is the basis on which a series of packages will be built, having as a common point, the creation of drawings useful in the teaching of mathematics. The main function of `tkz-base` is to provide an orthogonal coordinate system, and to let the user choose the graphical units. This package requires version 3 or higher of TikZ. **You must load `tkz-base` before `tkz-euclide` or `tkz-fct`.**

I'd like to thank **Till Tantau** for creating the wonderful tool `TikZ`.

I thank **Yves Combe** for sharing his work on the protractor and the compass constructions. I would also like to thank, **David Arnold** who corrected a lot of errors and tested many examples, **Wolfgang Büchel** who also corrected errors and built great scripts to get the example files, **John Kitzmiller** and **Dimitri Kapetas** for their examples, **Gaétan Marris** for his remarks and corrections, and finally **Laurent Van Deik** for all his corrections, remarks and questions.

You will find many examples on my site: altermundus.fr.

You can send your remarks, and reports on errors you find, to the following address: [Alain Matthes](mailto:Alain.Matthes@univ-lille.fr).
This file can be redistributed and/or modified under the terms of the \LaTeX Project Public License Distributed from [CTAN](http://www.ctan.org) archives.

Contents

1	News and presentation	7
2	Installation	8
3	Compilation of examples	9
3.1	Installation test	9
3.2	<code>xfp</code> and <code>numprint</code>	9
4	Presentation of <code>tkz-base</code>	10
4.1	Example that poses a problem	10
4.2	The role of <code>tkz-base</code>	10
4.3	Syntax of <code>tkz-base</code>	11
5	Initialization <code>\tkzInit</code>	11
5.1	The main macro <code>\tkzInit</code>	11
5.1.1	Changing the drawing size with <code>\tkzInit</code>	12
5.1.2	Role of <code>xstep</code> , <code>ystep</code>	12
5.2	Another example with <code>xstep</code> and <code>ystep</code>	13
5.2.1	Customized origin.	13
5.2.2	Use of decimals	13
5.2.3	Negative values	14
6	Macros for the axes	15
6.1	<code>\tkzDrawX</code>	15
6.1.1	No tick, no label	15
6.1.2	Label placement	15
6.1.3	Label and Axis Colour	16
6.1.4	Option <code>right space</code>	16
6.1.5	Trigonometric axis with the option <code>trig=n</code>	16
6.1.6	Trigonometric axis with the option <code>trig=2</code>	16
6.2	<code>\tkzLabelX</code>	16
6.2.1	Position of the graduations	17
6.2.2	Position of the graduations with <code>xlabel style</code>	17
6.2.3	Dates with <code>np off</code>	17
6.2.4	<code>frac</code>	17
6.2.5	<code>trig</code>	17
6.2.6	Graduations size	17
6.2.7	Colour of the graduations	18
6.2.8	Axis drawings before the graduation	18
6.2.9	Graduations (except originally) prior to tracings	19
6.2.10	Only positive graduations before drawings	19
6.2.11	No graduations at the origin	19
6.3	<code>\tkzAxeX</code>	19
6.3.1	Example with <code>\tkzAxeX</code>	20
6.3.2	Use of <code>pi</code> and <code>\tkzAxeX</code>	20
6.3.3	Option <code>frac</code> and <code>trig</code>	20
6.4	<code>\tkzDrawY</code>	20
6.5	<code>\tkzLabelY</code>	21
6.6	<code>\tkzAxeY</code>	21
6.7	<code>\tkzAxeXY</code>	21
6.7.1	Colour of axes, graduations	22
6.7.2	Option <code>label={}</code>	22

6.7.3	Option <code>swap</code>	22
6.8	<code>\tkzDrawXY</code>	22
6.8.1	Common colour and empty labels	23
6.8.2	Two trigonometric axes	23
6.9	<code>\tkzLabelXY</code>	23
6.10	Changing values by axis default	23
6.10.1	Changing the default axes	24
7	Use of <code>\tkzGrid</code>	25
7.0.1	<code>\tkzGrid</code> and the option <code>sub</code>	25
7.0.2	Option <code>sub</code>	25
7.0.3	Almost Default	26
7.0.4	Under the grid, too, option <code>sub</code>	26
7.0.5	Grid change	26
7.0.6	Option <code>xstep</code> , <code>xstep</code> , <code>subxstep</code> and <code>substep</code>	26
7.0.7	With large intervals	27
7.0.8	<code>\tkzGrid</code> and the arguments	27
7.0.9	Use of <code>pi</code> with <code>\tkzGrid</code>	27
7.0.10	Options <code>frac</code> and <code>trig</code> with <code>\tkzGrid</code>	28
7.0.11	Use of a repetition grid	28
8	The points	29
8.1	Defining a point in Cartesian coordinates: <code>\tkzDefPoint</code>	29
8.1.1	Use of <code>shift</code>	29
8.2	Placing a label with the library <code>quotes</code>	29
8.2.1	Rotation with <code>shift</code> and <code>scope</code>	30
8.2.2	Forms and coordinates	30
8.2.3	Scope and <code>\tkzDefPoint</code>	30
8.3	Definition of points in Cartesian coordinates: <code>\tkzDefPoints</code>	31
8.3.1	Definition of points	31
8.4	Point relative to another: <code>\tkzDefShiftPoint</code>	31
8.4.1	Example with <code>\tkzDefShiftPoint</code>	31
8.5	Point relative to another: <code>\tkzDefShiftPointCoord</code>	32
8.5.1	Equilateral triangle with <code>\tkzDefShiftPointCoord</code>	32
8.5.2	Isosceles triangle with <code>\tkzDefShiftPointCoord</code>	32
8.6	Drawing a point <code>\tkzDrawPoint</code>	33
8.6.1	Default stitch style	33
8.6.2	Changing the style	33
8.6.3	Example of point plots	34
8.7	Drawing points <code>\tkzDrawPoints</code>	34
8.7.1	Example with <code>\tkzDefPoint</code> and <code>\tkzDrawPoints</code>	34
8.7.2	More complex example	35
8.8	Add a label to a point <code>\tkzLabelPoint</code>	35
8.8.1	Example with <code>\tkzLabelPoint</code>	35
8.8.2	Label and reference	35
8.9	Add labels to points <code>\tkzLabelPoints</code>	36
8.9.1	Example with <code>\tkzLabelPoints</code>	36
8.10	Automatic position of labels <code>\tkzAutoLabelPoints</code>	36
8.10.1	Example 1 with <code>\tkzAutoLabelPoints</code>	37
8.10.2	Example 2 with <code>\tkzAutoLabelPoints</code>	37
8.11	Point style with <code>\tkzSetUpPoint</code>	37
8.11.1	Simple example with <code>\tkzSetUpPoint</code>	38
8.11.2	Second example with <code>\tkzSetUpPoint</code>	38

8.11.3	Using <code>\tkzSetUpPoint</code> in a group	38
8.12	Show point coordinates	38
8.12.1	Default styles	39
8.12.2	Example with <code>\tkzPointShowCoord</code>	39
8.12.3	Example with <code>\tkzPointShowCoord</code> and <code>xstep</code>	40
8.13	<code>\tkzDefSetOfPoints</code>	40
8.13.1	Creating a scatter plot with <code>\tkzDefSetOfPoints</code>	40
9	Style Use	41
9.1	Modification of <code>tkz-base</code>	41
9.2	Use <code>\tikzset</code>	41
10	Controlling Bounding Box	43
10.1	Utility of <code>\tkzInit</code>	43
10.2	<code>\tkzInit</code>	43
10.3	<code>\tkzClip</code>	44
10.4	<code>tkzClip</code>	44
10.5	<code>\tkzClip</code> and the option <code>space</code>	44
10.6	<code>tkzShowBB</code>	45
10.6.1	Example with <code>\tkzShowBB</code>	45
10.7	<code>tkzClipBB</code>	45
10.7.1	Example with <code>\tkzClipBB</code> and the bisectors	45
11	Use Additional Objects or Tools	46
12	Using an orthogonal coordinate system	47
12.1	Coordinate system with <code>\tkzRep</code>	47
12.1.1	Some modifiable styles	47
12.1.2	Example of use	47
13	Lines parallel to the axes	48
13.1	Draw a horizontal line with <code>\tkzHLine</code>	48
13.1.1	Horizontal line	48
13.1.2	Horizontal line and value calculated by <code>xfp</code>	48
13.2	Horizontal lines with <code>\tkzHLines</code>	49
13.2.1	Horizontal lines	49
13.3	Draw a vertical line with <code>\tkzVLine</code>	49
13.3.1	Vertical line	50
13.3.2	Vertical line and value calculated by <code>xfp</code>	50
13.4	Vertical lines with <code>\tkzVLines</code>	50
13.4.1	Vertical lines	50
14	Ticks on the axes	50
14.1	Drawing one tick on the abscissa axis <code>\tkzHTick</code>	50
14.1.1	Example	51
14.2	Drawing ticks on the abscissa axis <code>\tkzHTicks</code>	51
14.3	Drawing one tick on the ordinate axis <code>\tkzVTick</code>	51
14.4	Drawing ticks on the ordinate axis <code>\tkzVTicks</code>	51
15	Marks or symbols	53
15.1	<code>\tkzDrawSetOfPoints</code>	53
15.1.1	Drawing of a scatter plot with <code>\tkzDrawSetOfPoints</code>	53
15.2	<code>\tkzJoinSetOfPoints</code>	53
15.2.1	Link the points of a scatter plot with <code>\tkzJoinSetOfPoints</code>	54

15.2.2	Using the points of a scatter plot	54
15.3	<code>\tkzSetUpMark</code>	54
15.3.1	Two scatter plots	55
15.4	<code>\tkzDrawMark</code>	55
15.4.1	Ball; use of <code>\tkzDrawMarks</code>	55
15.5	<code>\tkzDrawMarks</code>	55
15.5.1	Mark and plot; use of <code>\tkzDrawMarks</code>	56
16	Texts and Legends	57
16.1	Placing a title	57
16.1.1	A title	57
16.1.2	Draft	57
16.1.3	Text with a point	57
16.1.4	Text format	58
16.2	Placing legends	58
16.2.1	Legends with symbols	59
17	FAQ	60
17.1	General Questions	60
17.2	Most common errors	60
	Index	61

1 News and presentation

This package was the foundation of the `tkz-euclide` and `tkz-fct` in particular. Now **tkz-euclide** is independent of `tkz-base`. **tkz-euclide** should be used only for Euclidean geometry. The package has been modified and object transfers between **tkz-base** and **tkz-euclide** have been performed.

tkz-base provides a Cartesian system that will be defined by the macro `\tkzInit`. The big difference now between `tkz-base` and **tkz-euclide** is the role of the units. The unit in **tkz-euclide** is the cm and is fixed. This is not the case with **tkz-base**.

The main novelty is the recent replacement of the `fp` package by `xfp`. The appearance of this one is a step towards version 3 of \LaTeX . The next step will be the creation of a new package.

Here are some of the changes. The **tkz-euclide** package brings more new features. **tkz-euclide** is used for some examples in this documentation.

- Code Improvement;
- Bug correction;
- The bounding box is now controlled in each macro (hopefully) to avoid the use of `\tkzInit` followed by `\tkzClip`;
- Logically most macros accept TikZ options. So I removed the "duplicate" options;
- Removing the option "label options";
- Random points are now in **tkz-euclide** and the macro `\tkzGetRandPointOn` is replaced by `\tkzDefRandPointOn`. For homogeneity reasons, the points must be retrieved with `\tkzGetPoint`;
- The options **end** and **start** which allowed to give a label to a line are removed. You must now use the macro `\tkzLabellLine`;
- Introduction of the libraries `quotes` and `angles` they allows to give a label to a point. even if I am not in favour of this practice;
- Appearance of the macro `\usetkztool`, which allows to load new "tools".

2 Installation

`tkz-base` is now on the server of the CTAN¹. If you want to test a beta version, just put the following files in a `texmf` folder that your system can find. You will have to check several points:

- The `tkz-base` folder must be located on a path recognized by `latex`.
- The `tkz-base` uses `xfp`.
- This documentation and all examples were obtained with `lualatex` but `pdflatex` or `xelatex` should be suitable.


¹ `tkz-base` is part of TeXLive and `tlmgr` allows you to install them. This package is also part of MiKTeX under Windows.

3 Compilation of examples

3.1 Installation test

The code below allows you to test your installation of `tkz-base`. Please note that `xfp` as well as `numprint` must be present as well as version 3.01 (or higher) of `pgf`. All examples and this documentation have been compiled using `Lua \LaTeX` .

```
\documentclass{standalone}
\usepackage{tkz-base}
\begin{document}
\begin{tikzpicture}
\tkzInit[xmax=4,ymax=4]
\tkzGrid
\tkzAxeXY
\end{tikzpicture}
\end{document}
```

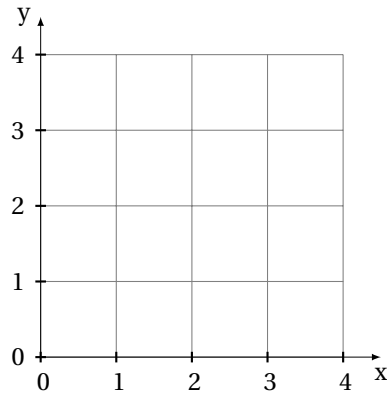

Notes on this test

1. The compilation of this document and examples is obtained with `lua \LaTeX` .
2. `tkz-base` loads `numprint` with the option `autolanguage,xfp` and of course `TikZ`.
3. `TikZ` seems that version 3 of `pgf` has fixed those problems. In case of difficulty, it is recommended to load the `babel` library with `\usetikzlibrary{babel}`. Another possibility is to compile with `Lua \LaTeX` .

3.2 `xfp` and `numprint`

`xfp` now replaces `fp` in this package. One of the advantages for the user is a simplified syntax. It allows to manage calculations on large or very small numbers with precision. This slows down the compilation a bit, so it is better not to overuse it. `xfp` is used above all, to obtain correct graduations. `numprint` was present when I started to write this series of packages, since `siunitx` has grown and I can understand that some people prefer it. In a future version, I plan to leave the choice of the package for displaying numbers.

4 Presentation of tkz-base

4.1 Example that poses a problem

The following code gives an error

```
\begin{tikzpicture}
  \draw (0,0)--(6000,0);
\end{tikzpicture}
```

Latex Error: ... Dimension too large.

Indeed, the default unit is a centimeter but \TeX cannot store a dimension greater than 575 cm, which leads to an error. \TeX however, can store integers up to $2^{31} - 1$, so it is possible to work on integers first and then define the dimensions.

```
\begin{tikzpicture}[x=0.01 cm]
  \draw (0,0)--(6000 cm,0);
\end{tikzpicture}
```

Latex Error: ... Dimension too large.

The previous code still makes an error. Indeed, 600 cm is a dimension and does not take into account the change of unit. The correct version is:

```
\begin{tikzpicture}[x=0.01 cm]
  \draw (0,0)--(6000,0);
\end{tikzpicture}
```

This time, the stored dimension is 6 cm which is acceptable. It is possible with \TeX to handle large whole numbers, but, on the other hand, the dimensions cannot exceed 16,384 pt or approximately 5.75 m.

With \TeX , it's also possible to work with the `xfp` package. This allows him to work at longer intervals, but at the cost of a certain slowness. This is the method I have preferred for some sensitive calculations that require good precision, such as calculations to measure angles or segment length, but it is necessary once a number has been found to assign it to a dimension. We always find the same constraints.

4.2 The role of tkz-base

The following code gives an error not because 6,000,000 is too large, but because 0.000,001 cm is too small.

Latex Error:

```
\begin{tikzpicture}[x=0.000001 cm]
  \coordinate (x) at (6000000,0);
  \draw (0,0)--(x);
\end{tikzpicture}
```

With `tkz-base`, it will be possible to work with any coordinates, but it will be necessary to use the macros of the package.

`tkz-base` simplifies the use of different value ranges. This package is used by `tkz-fft` which allows to draw graphical representations of functions using `gnuplot`.

First of all, you should know that it is not necessary to deal with TikZ with the size of the support (bounding box); however it is sometimes necessary, either to draw a grid, or to draw axes, or to work with a different unit than the

centimeter, or finally to control the size of what will be displayed. To do this, you must have prepared the frame in which you are going to work, this is the role of `tkz-base` and its main macro `\tkzInit`. For example, if you want to work on a 10 cm square, but such that the unit is the dm then you will have to use.

```
\tkzInit[xmax=1,ymax=1,xstep=0.1,ystep=0.1]
```

`xstep=0.1` means that 1cm represents the 0.1 graduation so the 1 graduation is at 10 cm from the origin.

On the other hand, for values of x between 0 and 10,000 and values of y between 0 and 100,000, it will be necessary to write

```
\tkzInit[xmax=10000,ymax=100000,xstep=1000,ystep=10000]
```

The result is always a 10 cm square.

All this makes little sense for Euclidean geometry, and in this case it is recommended to leave the graphic unit equal to 1 cm. I have not tested whether all macros for Euclidean geometry accept other values than `xstep=1` and `ystep=1`. On the other hand, for some drawings, it is interesting to fix the extreme values and to "clip" the definition rectangle in order to control the size of the figure as well as possible.

4.3 Syntax of tkz-base

I tried to generalize the following syntax:

- The syntax is close to that of \LaTeX , there's no need for ";" with `tkz-base`.
- all the macros have names beginning with `tkz`;
- braces are used to pass a parameter that will be the reference of an object created by the macro;
- parentheses are used to refer to an object that has already been created or to a coordinate pair;
- square brackets are necessary to pass optional arguments or options, some choices are sometimes mandatory. The use of the comma even in a Math mode requires to be protected in a TeX group;
- blanks (space) are prohibited between `[...]` and `(...)`, `[...]` and `{...}`, as well as between `(...)` and `{...}`, but it is possible to put spaces between passed in optional arguments `[...]`.

5 Initialization \tkzInit

5.1 The main macro \tkzInit


```
\tkzInit[<local options>]
```

options	default	definition
<code>xmin</code>	0	minimum value of the abscissae in cm
<code>xmax</code>	10	maximum value of the abscissae in cm
<code>xstep</code>	1	difference between two graduations in x
<code>ymin</code>	0	minimum y-axis value in cm
<code>ymax</code>	10	maximum y-axis value in cm
<code>ystep</code>	1	difference between two graduations in y

The role of `tkzInit` is to define a **orthogonal** coordinates system and a rectangular part of the plane in which you will place your drawings using Cartesian coordinates. The coordinates system does not have to be normalized. This macro allows you to define your working environment as with a calculator.


5.1.1 Changing the drawing size with `\tkzInit`


This macro sets the stage and defines several constants. It is quite possible to make a figure larger than the pre-defined rectangle. Moreover, as you can see, it is possible to use the commands of TikZ in the middle of those of `\tkz` but **attention to the units! This possibility must be reserved for exceptional cases only.**

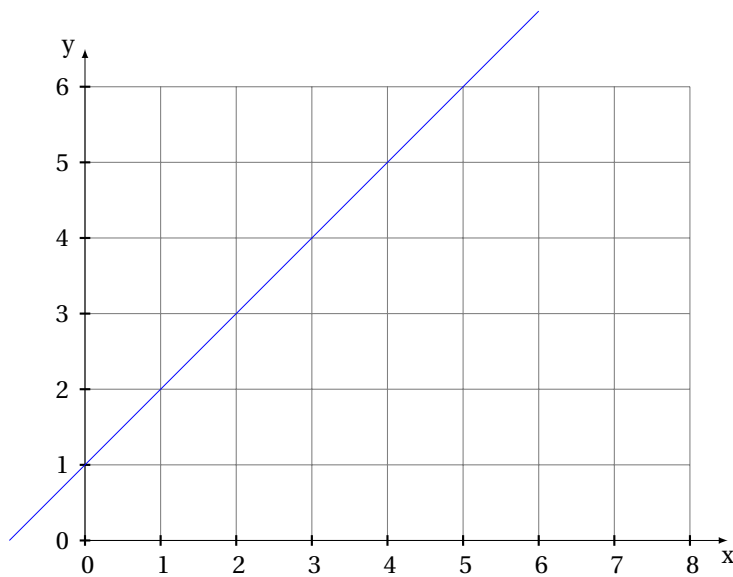

```
\begin{tikzpicture}
  \tkzInit[xmax=8,ymax=6]
  \tkzGrid
  \tkzAxeXY
  \draw[blue](-1,0)--(6,7);
\end{tikzpicture}
```


5.1.2 Role of `xstep` , `ystep`

 Warning, a graduation is represented by 1 cm, unless you resize the figure with the `scale` option. In the example below `xstep = 2` corresponds to 1 cm, so between 0 and 10, we will need 5 cm. Similarly `ystep=400`, so between 0 and 800 there are 2 cm. It is not possible to use the options of TikZ, `x=...` and `y=...`

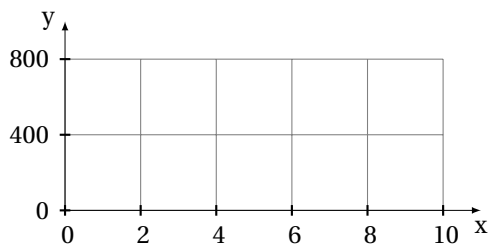

```
\begin{tikzpicture}
  \tkzInit[xmax=10,xstep=2,ymax=800,ystep=400]
  \tkzGrid
  \tkzAxeXY
\end{tikzpicture}
```


5.2 Another example with xstep and ystep

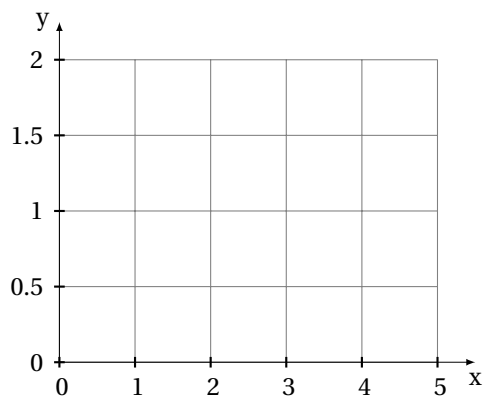

```
\begin{tikzpicture}
  \tkzInit[xmax=5,xstep=1,ymax=2,ystep=.5]
  \tkzGrid
  \tkzAxeXY
\end{tikzpicture}
```

5.2.1 Customized origin.

It is important to note that you can place a point without calculating anything.

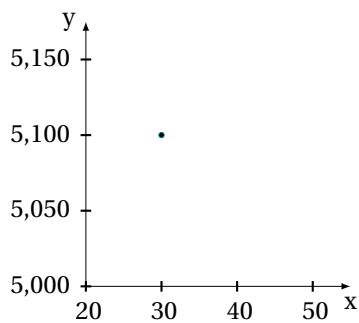


```
\begin{tikzpicture}
  \tkzInit[xmin=20,
    xmax=50,
    xstep=10,
    ymin=5000,
    ymax=5150,
    ystep=50]
  \tkzAxeXY
  \tkzDefPoint(30,5100){A}
  \tkzDrawPoint(A)
\end{tikzpicture}
```

5.2.2 Use of decimals

It is preferable to write the different arguments relating to an axis with the same number of decimals. `numprint` is used to display the graduations correctly.

In the following example, `numprint` uses the English conventions for writing numbers because I used:

```
\usepackage[english]{babel}
```

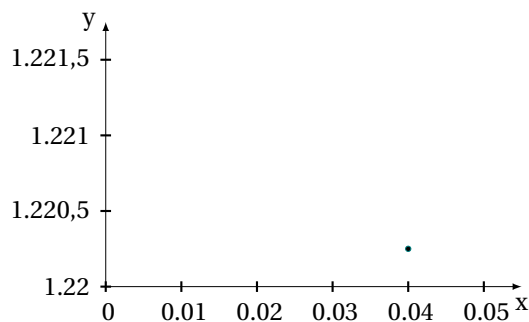


```

\begin{tikzpicture}
  \tkzInit[xmin=0.00, xmax=0.05,
           ymin=1.2200,ymax=1.2215,
           xstep=0.01, ystep=0.0005]
  \tkzAxeXY
  \tkzDefPoint(.04,1.22025){I}
  \tkzDrawPoint(I)
\end{tikzpicture}

```

5.2.3 Negative values

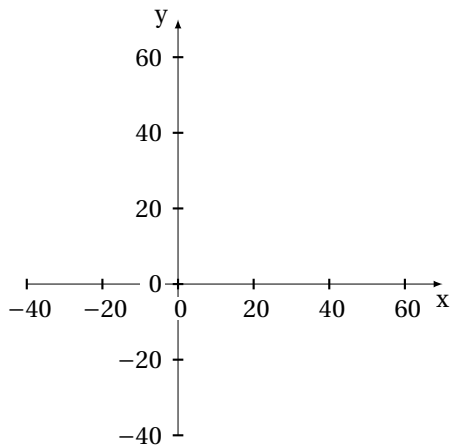


```

\begin{tikzpicture}
  \tkzInit[xmin = -40,
           xmax = 60,
           ymin = -40,
           ymax = 60,
           xstep = 20,
           ystep = 20]
  \tkzAxeXY
\end{tikzpicture}

```

6 Macros for the axes


 Careful, these macros have been modified. It's now easier to use the styles of TikZ. `\tkzDrawX` allows to draw an axis, `\tkzLabelX` places graduations and finally in simple cases `\tkzAxeX` traces and graduations. The options of TikZ are accessible. Fractions can be used for graduations.

6.1 `\tkzDrawX`

```
\tkzDrawX[<local options>]
```

This macro allows you to draw the abscissa axis with default ticks. The options are those of TikZ plus the following ones:

options	default	definition
color	black	Axis and ticks
noticks	false	no ticks on axis
right space	0.5 cm	axis extended right
left space	0 cm	extension of the axis to the left
label	x	label name
trig	0	if $\langle \rangle \neq 0$ graduations are multiples of π/trig "trig is an integer"
tickwd	0.8pt	tick thickness
tickup	1pt	tick over axis
tickdn	1pt	tick depth over axis

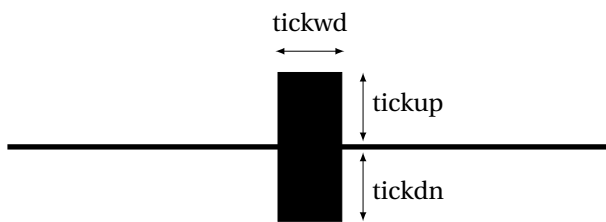


This macro is used to draw the abscissa axis. The most important thing is to test all the options. Above, you have the values that define a tick. Otherwise the options of TikZ apply and in particular `text`, `color`, `fill` and `font`.

6.1.1 No tick, no label



```
\begin{tikzpicture}
  \tkzInit[xmax=5]
  \tkzDrawX[label={},noticks]
\end{tikzpicture}
```

6.1.2 Label placement




```
\begin{tikzpicture}
  \tkzInit[xmax=5]
  \tkzDrawX[label      = quantity,
             above left = 8pt]
\end{tikzpicture}
```

6.1.3 Label and Axis Colour

The color of the label is obtained with the option `text`, that of the axis with the option `color`.

The option `right=12pt` shifts the label `x` by 12 pt.




```

\begin{tikzpicture}
  \tkzInit[xmax=5]
  \tkzDrawX[text=blue,color=red,right=12pt]
\end{tikzpicture}

```

6.1.4 Option right space

It adds a little space after the last tick.




```

\begin{tikzpicture}
  \tkzInit[xmax=0.4,xstep=0.1]
  \tkzDrawX[text=blue,color=red,right=12pt,right space=1]
\end{tikzpicture}

```

6.1.5 Trigonometric axis with the option trig=n

If `number = 0` then the axis is graduated from cm to cm, otherwise the axis is graduated using multiples of $\frac{\pi}{\text{number}}$.




```

\begin{tikzpicture}
  \tkzInit[xmin=0,xmax=4,ymin=-1,ymax=1]
  \tkzDrawX[trig=1]
\end{tikzpicture}

```

6.1.6 Trigonometric axis with the option trig=2



```

\begin{tikzpicture}
  \tkzInit[xmin=0,xmax=4,ymin=-1,ymax=1]
  \tkzDrawX[trig=2]
\end{tikzpicture}

```

6.2 \tkzLabelX


```
\tkzLabelX[<local options>]
```

This macro allows you to place graduations. The option `orig` can be used again, but its behavior is reversed. By default, the original value is placed. The options are those of TikZ, plus the following ones:

options	default	definition
<code>frac</code>	0	if $\langle 0 \rangle$ graduations are multiples <code>num/frac</code> " <code>frac</code> is an integer"
<code>trig</code>	0	if $\langle 0 \rangle$ graduations are multiples <code>pi/trig</code> " <code>trig</code> is an integer"
<code>font</code>	<code>\textstyle</code>	scale size.
<code>color</code>	black	graduation color
<code>step</code>	1	interval between graduations
<code>np off</code>	false	numprint deactivation
<code>orig</code>	true	displays the origin graduation

`frac` and `trig` are integers that can be changed to fractional or trigonometric writing.

6.2.1 Position of the graduations




```

\begin{tikzpicture}
\tkzInit[xmax=.5,xstep=0.1]
\tkzDrawX[label=$t$,text=blue,color=red]
\tkzLabelX[text=blue,below = 3pt]
\end{tikzpicture}

```

6.2.2 Position of the graduations with xlabel style




```

\begin{tikzpicture}
\tkzInit[xmin=1000,xmax=4000,xstep=1000]
\tkzDrawX
\tikzset{xlabel style/.append style={rotate=-30}}
\tkzLabelX[below right=3 pt,inner sep = 1pt]
\end{tikzpicture}

```

6.2.3 Dates with np off

For dates, you have to deactivate numprint.




```

\begin{tikzpicture}
\tkzInit[xmin=2000,xmax=2004]
\tkzDrawX
\tikzset{xlabel style/.append style={rotate=-30}}
\tkzLabelX[np off,below right=3 pt,inner sep = 1pt]
\end{tikzpicture}

```

6.2.4 frac




```

\begin{tikzpicture}
\tkzInit[xmax=1.75,xstep=0.33333]
\tkzDrawX[label=$t$,text=blue,color=red]
\tkzLabelX[frac=3,text=blue,below = 6pt]
\end{tikzpicture}

```

6.2.5 trig

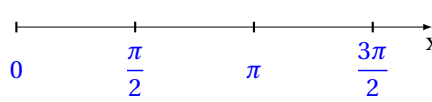

```


\begin{tikzpicture}
\tkzInit[xmin=0,xmax=5,ymin=-1,ymax=1]
\tkzDrawX[trig=2]
\tkzLabelX[trig=2,text=blue,below = 8pt]
\end{tikzpicture}

```


6.2.6 Graduations size

Two possibilities. It is possible to define the default style used for the math mode:


```
\let\tkzmathstyle\textstyle
```




```
\begin{tikzpicture}
\tkzInit[xmin=0,xmax=5,ymin=-1,ymax=1]
\tkzDrawX[trig=2]
\tkzLabelX[trig=2,text=blue,below = 8pt]
\end{tikzpicture}
```



```
\begin{tikzpicture}
\tkzInit[xmin=0,xmax=5,ymin=-1,ymax=1]
\let\tkzmathstyle\textstyle
\tkzDrawX[trig=2]
\tkzLabelX[trig=2,text=blue,
below = 8pt]
\end{tikzpicture}
```




```
\begin{tikzpicture}
\tkzInit[xmin=0,xmax=5,ymin=-1,ymax=1]
\tkzDrawX[trig=2]
\tkzLabelX[trig=2,text=blue,
below = 8pt,node font=\small]
\end{tikzpicture}
```



```
\begin{tikzpicture}
\tkzInit[xmin=0,xmax=5,ymin=-1,ymax=1]
\tkzDrawX[trig=2]
\tkzLabelX[trig=2,text=blue,
below = 8pt,node font=\scriptsize]
\end{tikzpicture}
```

6.2.7 Colour of the graduations

The key here is to use the color, text, and text options correctly.




```
\begin{tikzpicture}
\tkzInit[xmin = -2,xmax = 3,
ymin = -2,ymax = 2]
\tkzDrawX[color = red,
label = $\displaystyle\frac{1}{t}$,
below = 6pt]
\tkzLabelX[text=blue]
\end{tikzpicture}
```

6.2.8 Axis drawings before the graduation


In some cases, it is preferable to place `\tkzDrawXY` after `\tkzLabelX` and `\tkzLabelY`.

This prevents display problems.

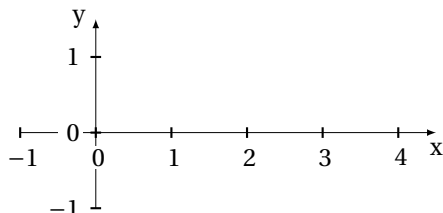


```
\begin{tikzpicture}
\tkzInit[xmin = -1,xmax = 4,
ymin = -1,ymax = 1]
\tkzDrawXY \tkzLabelX \tkzLabelY
\end{tikzpicture}
```

6.2.9 Graduations (except originally) prior to tracings

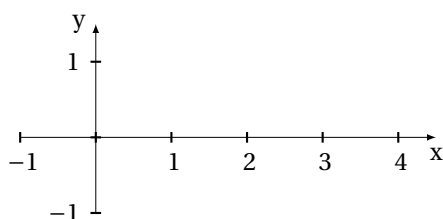


```
\begin{tikzpicture}
  \tkzInit[xmin = -1,xmax = 4,
           ymin = -1,ymax = 1]
  \tkzLabelX[orig=false]
  \tkzLabelY[orig=false]
  \tkzDrawXY
\end{tikzpicture}
```

6.2.10 Only positive graduations before drawings



```
\begin{tikzpicture}
  \tkzInit[xmin=2,ymin=2,xmax=4,ymax=4]
  \tkzLabelX \tkzLabelY
  \tkzDrawXY
\end{tikzpicture}
```

6.2.11 No graduations at the origin



```
\begin{tikzpicture}
  \tkzInit[xmin=2,ymin=2,xmax=4,ymax=4]
  \tkzLabelX[orig] \tkzLabelY[orig]
  \tkzDrawXY
\end{tikzpicture}
```


6.3 `\tkzAxeX`

`\tkzAxeX[<local options>]`


This macro allows you to draw the abscissa axis with default ticks as well as the graduations. It combines the two macros `\tkzDrawX` and `\tkzLabelX`. It should only be used in simple cases.

options	default	definition
label	x	label name
trig	0	if $<>0$, graduations are multiples of π/trig
frac	0	if $<>0$, graduations are multiples of $1/\text{frac}$
swap	false	allows you to run <code>\tkzLabelX</code> before <code>\tkzDrawX</code>

The option `text` defines the color of the graduations.

6.3.1 Example with `\tkzAxeX`


```
\begin{tikzpicture}
\tkzInit[xmax=0.5,xstep=0.1,ymax=1]
\tkzGrid
\tkzAxeX[text=blue]
\end{tikzpicture}
```

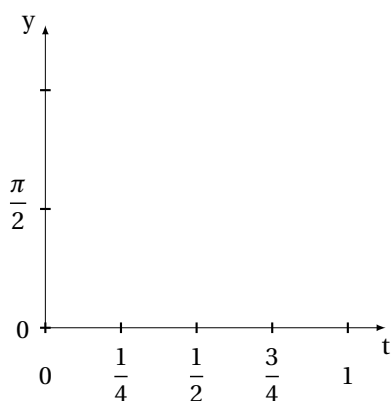6.3.2 Use of `pi` and `\tkzAxeX`

```
\begin{tikzpicture}
\tkzInit[xmax=4,ymax=3.5]
\let\tkzmathstyle\displaystyle
\tkzLabelX[orig = false, frac = 4,below = 10pt]
\tkzDrawX[label = $t$]
\tkzAxeY[trig=2]
\end{tikzpicture}
```

6.3.3 Option `frac` and `trig`

In this example, we position the `t` label as well as the graduations. `\below=10pt` is used to place the graduations underneath.

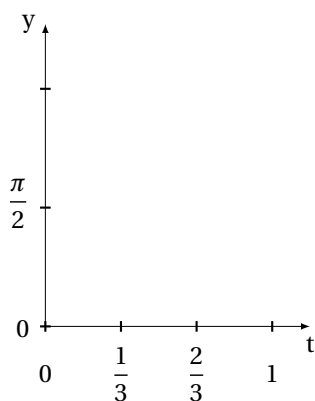

```
\begin{tikzpicture}
\tkzInit[xmax=9,xstep=3,ymax=3.5]
\tkzLabelX[below=10pt,orig=false,frac=3]
\tkzDrawX[label = $t$]
\tkzAxeY[trig=2]
\end{tikzpicture}
```

6.4 `\tkzDrawY`

```
\tkzDrawY[<local options>]
```

This macro allows you to draw the ordinate axis with default ticks. The options are those of TikZ plus the following ones:

options	default	definition
color	black	color of axis and ticks
noticks	false	no ticks on the axis
up space	0.5 cm	top axis extension
down space	0 cm	axis extension down
label	x	label name
trig	0	if $\langle \rangle 0$, graduations are multiples of π/trig "trig is an integer"
tickwd	0.8pt	tick's thickness
ticklt	1pt	height of the tick above the axis
tickrt	1pt	above-axis tick depth

6.5 `\tkzLabelY`

`\tkzLabelY[\langle local options \rangle]`

This macro allows you to draw the abscissa axis with default ticks. The options are those of TikZ plus the following ones:

options	default	definition
color	black	graduation color
frac	0	if $\langle \rangle 0$, graduations are multiples of $1/\text{frac}$ "frac is an integer"
font	<code>\textstyle</code>	graduation size.
step	1	interval between graduations

frac is a integer that can be changed to fractional or trigonometric writing.

6.6 `\tkzAxeY`

`\tkzAxeY[\langle local options \rangle]`

This macro combines the two macros: `\tkzDrawY` `\tkzLabelY` See `\tkzAxeX` for options.


6.7 `\tkzAxeXY`

`\tkzAxeXY[\langle local options \rangle]`

This macro combines the four macros: `\tkzDrawX` `\tkzDrawY` `\tkzLabelX` `\tkzLabelY`


It is necessary to use common options as in the example below, but this means that the same options are applied to both macros. Thus it is not possible to change `label`.

6.7.1 Colour of axes, graduations

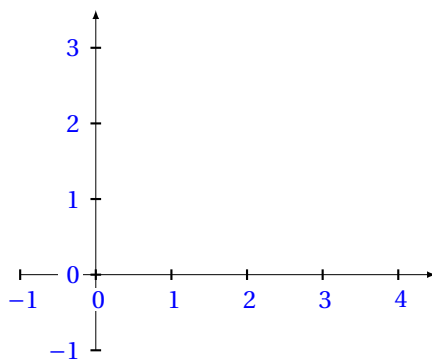


```
\begin{tikzpicture}
  \tkzInit[xmin=-1,xmax=4,ymin=-1,ymax=3]
  \tkzAxeXY[label={},text=blue]
\end{tikzpicture}
```

6.7.2 Option label={}

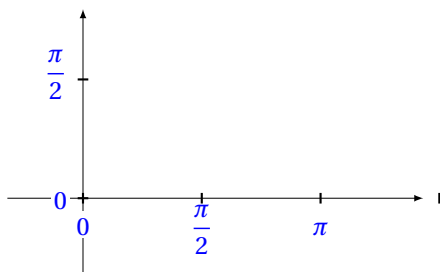

```
\begin{tikzpicture}
  \tkzInit[xmin=-1,xmax=4,ymin=-1,ymax=2]
  \tkzAxeXY[label={},text=blue,trig=2]
\end{tikzpicture}
```

6.7.3 Option swap

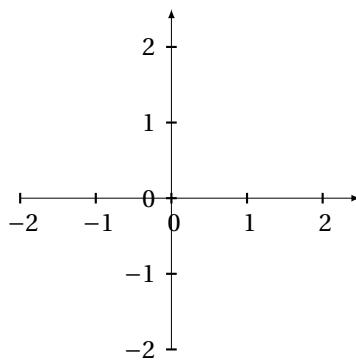


```
\begin{tikzpicture}
  \tkzInit[xmin=-2,xmax=2,ymin=-2,ymax=2]
  \tkzAxeXY[label={},swap]
\end{tikzpicture}
```

6.8 \tkzDrawXY

```
\tkzDrawXY[<local options>]
```


This macro combines the two macros: `\tkzDrawX`\code{\tkzDrawY}. It is necessary to use common options as in the example below.

6.8.1 Common colour and empty labels

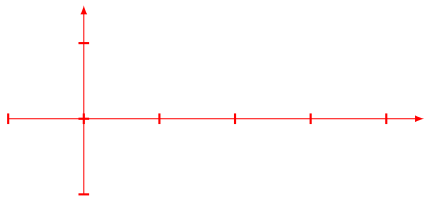

```
\begin{tikzpicture}
  \tkzInit[xmin=-1,xmax=4,ymin=-1,ymax=1]
  \tkzDrawXY[label={},color=red]
\end{tikzpicture}
```

6.8.2 Two trigonometric axes

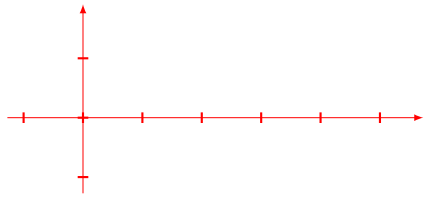

```
\begin{tikzpicture}
  \tkzInit[xmin=-1,xmax=4,ymin=-1,ymax=1]
  \tkzDrawXY[label={},color=red,trig=4]
\end{tikzpicture}
```

6.9 \tkzLabelXY


```
\tkzLabelXY[⟨local options⟩]
```

This macro combines the two macros:

```
\tkzLabelX\tkzLabelY
```

It is necessary to use common options as in the example below.

6.9.1

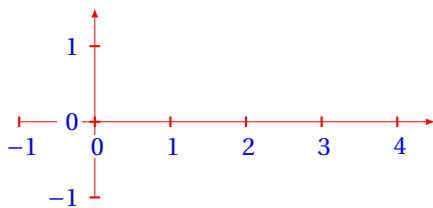


```
\begin{tikzpicture}
  \tkzInit[xmin=-1,xmax=4,ymin=-1,ymax=1]
  \tkzDrawXY[label={},color=red]
  \tkzLabelXY[text=blue]
\end{tikzpicture}
```

6.10 Changing values by axis default

```
\tkzSetUpAxis[⟨local options⟩]
```

options	default	definition
line width	0.4pt	line width defines the width of the line
tickwd	0.8pt	tick thickness
ticka	1pt	right side or above the tick
tickb	1pt	left side or below the tick
font	\textstyle	graduation size.

6.10.1 Changing the default axes

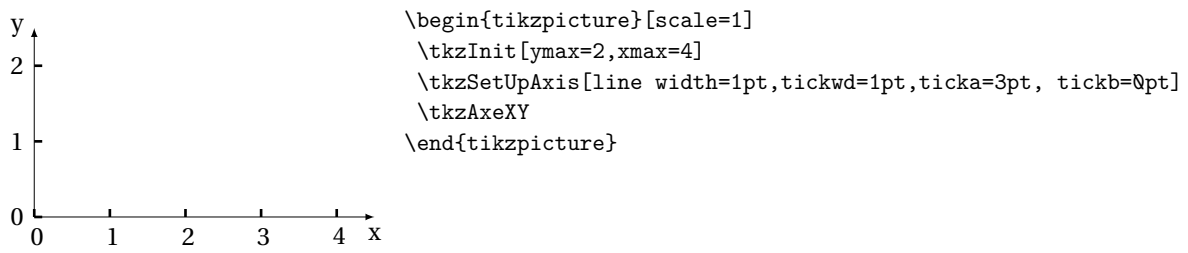

You have to run `\tkzSetUpAxis` again to retrieve the default values.

```
\tkzSetUpAxis[line width=1pt,tickwd=1pt,ticka=2pt,tickb=2pt]
```


7 Use of `\tkzGrid`

```
\tkzGrid[local options](xA ; yA) (xB ; yB)
```

A few changes for this macro. First of all, to simplify currently the color of the thinnest grid is determined automatically from the main grid, same process for the thickness. This behavior can be modified using styles.


options	default	definition
<code>(<i>x_A ; y_A</i>) (<i>x_B ; y_B</i>)</code>	<code>(xmin,ymin)(xmax,ymax)</code>	grid pattern
options	default	definition
<code>sub</code>	<code>true</code>	asks for a sub-grid
<code>color</code>	<code>darkgray</code>	main grid color
<code>subxstep</code>	<code>0.2</code>	the step of the subgraduations for the abscissa axis
<code>subystep</code>	<code>0.2</code>	the step of the subgraduations for the ordinate axis
<code>line width</code>	<code>0.4pt</code>	main grid line thickness

Default values can be changed in the configuration file or by macros. The color of the second grid is the same as the main grid, but less intense (by default `gray!50`).

Same behavior for the line thickness (by default `0.75` of `line width`). See the examples to change this behavior.

7.0.1 `\tkzGrid` and the option `sub`


The option `sub` allows you to display a finer secondary grid. It is preferable to run `\tkzGrid` first, to prevent the grid from being overlapped with other elements.

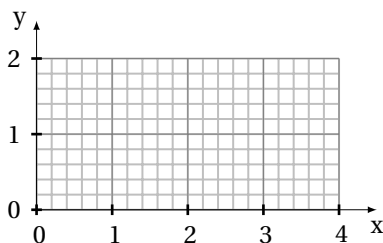

```
\begin{tikzpicture}
\tkzInit[xmax=4, ymax=2]
\tkzGrid[sub]
\tkzAxeXY
\end{tikzpicture}
```


7.0.2 Option `sub`

The option `sub` allows to display a finer secondary grid. Some parameters are modifiable.

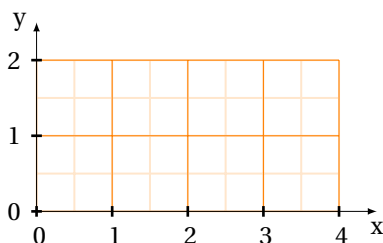


```
\def\tkzCoeffSubColor{20}% instead of 50
\def\tkzCoeffSubLw{0.2}% instead of 0.75
\begin{tikzpicture}
\tkzInit[xmax=4, ymax=2]
% we can change the step for the second grid
\tkzGrid[sub,color=orange,
subxstep=.5,subystep=.5]
\tkzAxeXY
\end{tikzpicture}
```

7.0.3 Almost Default

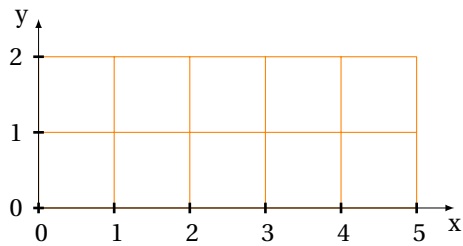


```
\begin{tikzpicture}
  \tkzInit[xmax=5,ymax=2]
  \tkzGrid[color=orange]
  \tkzAxeXY
\end{tikzpicture}
```

7.0.4 Under the grid, too, option sub

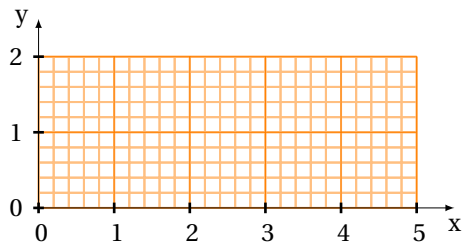


```
\begin{tikzpicture}
  \tkzInit[xmax=5,ymax=2]
  \tkzGrid[sub,color=orange]
  \tkzGrid[color=orange]
  \tkzAxeXY
\end{tikzpicture}
```

7.0.5 Grid change

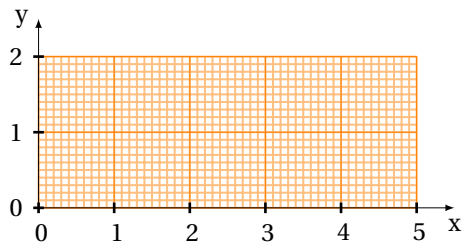


```
\begin{tikzpicture}
  \tkzInit[xmax=5,ymax=2]
  \tkzGrid[color = orange,
    sub,
    subxstep = 0.1,
    subystep = 0.1]
  \tkzAxeXY
\end{tikzpicture}
```

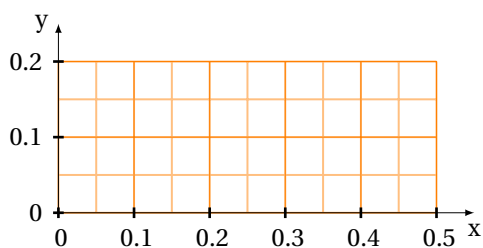7.0.6 Option `xstep`, `xstep`, `subxstep` and `subystep`

```
\begin{tikzpicture}
  \tkzInit[xmax=.5,xstep=.1,
    ymax=.2,ystep=.1]
  \tkzGrid[sub,
    subxstep = 0.05,
    subystep = 0.05,
    color=orange]
  \tkzAxeXY
\end{tikzpicture}
```


7.0.7 With large intervals

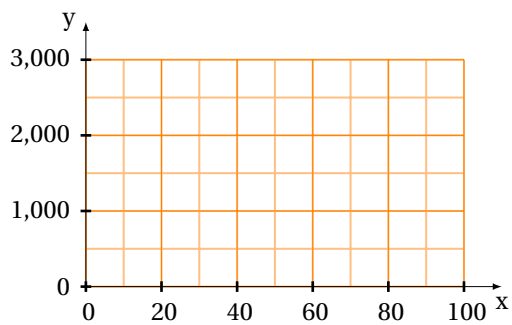

```
\begin{tikzpicture}
  \tkzInit[xmax=100,xstep=20,
           ymax=3000,ystep=1000]
  \tkzGrid[sub,subxstep=10,
           subystep=500,
           color=orange]
  \tkzAxeXY
\end{tikzpicture}
```


7.0.8 \tkzGrid and the arguments

The grid can be any size.

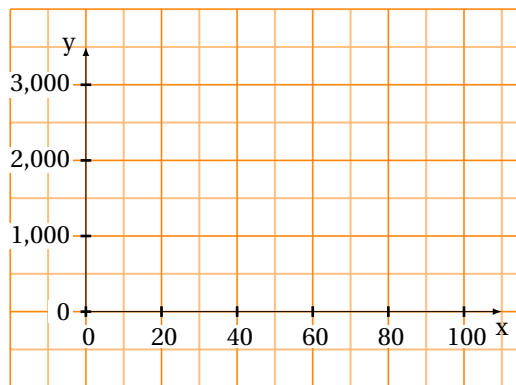


```
\begin{tikzpicture}
  \tkzInit[xmax=100,xstep=20,
           ymax=3000,ystep=1000]
  \tkzGrid[sub,subxstep=10,
           subystep=500,
           color=orange]
  \tkzAxeXY
\end{tikzpicture}
```

7.0.9 Use of pi with \tkzGrid

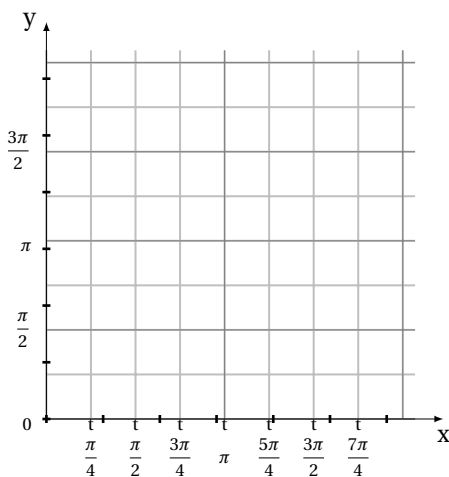


```
\begin{tikzpicture}[scale=.75]
  \tkzInit[xmax=6.5,ymax=6.5]
  \tkzGrid[xstep=pi,ystep=pi/2,sub,
           subxstep=pi/4,subystep=pi/4]
  \tkzLabelX[label=$t$,orig=false,trig=4,
            below=6pt,font=\scriptsize]
  \tkzLabelY[trig=2,font=\scriptsize]
  \tkzDrawXY
\end{tikzpicture}
```

7.0.10 Options frac and trig with \tkzGrid

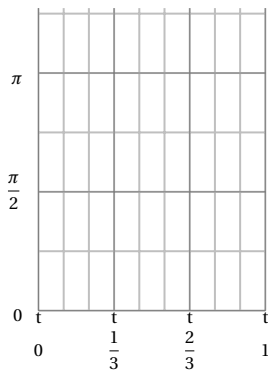

```
\begin{tikzpicture}
  \tkzInit[xmax=9,xstep=3,ymax=4]
  \tkzGrid[xstep=1,ystep=pi/2,sub,
    subxstep=1,subystep=pi/4]
  \tkzLabelX[label=$t$,orig=false,frac=3,
    below=6pt,font=\scriptsize]
  \tkzLabelY[trig=2,font=\scriptsize]
\end{tikzpicture}
```

7.0.11 Use of a repetition grid

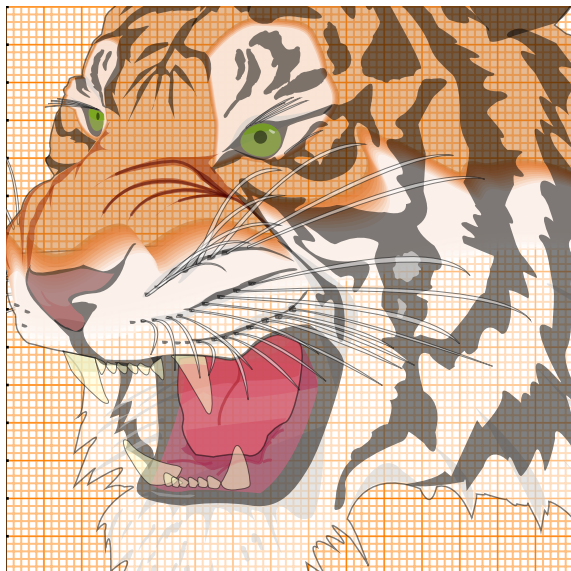

```
\begin{tikzpicture}[scale=.5]
  % \tikzset{xaxe style/.style ={-}}
  \tkzInit[xmax=15,ymax=15]
  \tkzClip
  \tkzGrid[sub,color=orange]
  \tkzLabelX[label= ] \tkzLabelY[label= ]
  \tkzDrawXY
  \node[opacity=.5] at (8,6){%
    \includegraphics[scale=.5]{tiger}};
\end{tikzpicture}
```

8 The points

I made a distinction between the point used in Euclidean geometry and the point used to represent an element of a statistical cloud. In the first case, I use as object a `node`, which means that the representation of the point cannot be modified by a `scale`; in the second case, I use as object a `plot mark`. The latter can be scaled and have more varied forms than the node.

The new macro is `\tkzDefPoint`, it allows to use TikZ-specific options as a `shift` and the values are processed with `tkz-base`. Moreover, if calculations are needed then the `xfp` package takes care of them. You can use Cartesian or polar coordinates.

8.1 Defining a point in Cartesian coordinates: `\tkzDefPoint`

<code>\tkzDefPoint[⟨local options⟩](⟨x,y⟩){⟨name⟩}</code> or <code>(⟨a:r⟩){⟨name⟩}</code>		
arguments	default	definition
<code>x,y</code>	no default	<code>x</code> and <code>y</code> are two dimensions, by default in cm.
<code>a:r</code>	no default	<code>a</code> is an angle in degrees, <code>r</code> is a dimension

The mandatory arguments of this macro are two dimensions expressed with decimals, in the first case they are two measures of length, in the second case they are a measure of length and the measure of an angle in degrees.

options	default	definition
<code>shift</code>	<code>(0,0)</code>	value spacing

All the options of TikZ that we can apply to `coordinate`, are applicable (well I hope!) as for example the option `label` defined with the library `quotes`.

8.1.1 Use of `shift`


`shift` allows the points to be placed in relation to each other.



```
\begin{tikzpicture}[trim left=-1cm]
\tkzDefPoint(2,3){A}
\tkzDefPoint[shift={(2,3)}](31:3){B}
\tkzDefPoint[shift={(2,3)}](158:3){C}
\tkzDrawSegments[color=red,line width=1pt](A,B A,C)
\tkzDrawPoints[color=red](A,B,C)
\end{tikzpicture}
```

8.2 Placing a label with the library `quotes`


I prefer not to mix operations and use `\tkzLabelPoint` to place labels. See the section "The Quotes Syntax" in the TikZ manual.

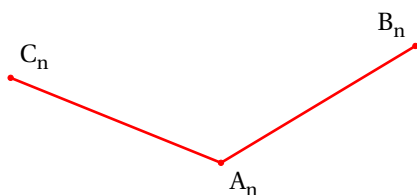

```
\begin{tikzpicture}[trim left=-1cm]
\tkzDefPoint["-60:$A_n$"] (2,3){A}
\tkzDefPoint[shift={(2,3)},%
"$B_n$" above left](31:3){B}
\tkzDefPoint[shift={(2,3)},%
"$C_n$" above right](158:3){C}
\tkzDrawSegments[color=red,%
line width=1pt](A,B A,C)
\tkzDrawPoints[color=red](A,B,C)
\end{tikzpicture}
```

8.2.1 Rotation with shift and scope


Preferable to rotate is to use a `scope` environment.



```
\begin{tikzpicture}[scale=.75,rotate=90]
\tkzDefPoint[label=right:$A_n$] (2,3){A}
\begin{scope}[shift={(A)}]
\tkzDefPoint[label= right:$B_n$] (31:3){B}
\tkzDefPoint[label= right:$C_n$] (158:3){C}
\end{scope}
\tkzDrawSegments[color=red,%
line width=1pt](A,B A,C)
\tkzDrawPoints[color=red](A,B,C)
\end{tikzpicture}
```

8.2.2 Forms and coordinates


Here we must follow the syntax of `xfp`. It is always possible to go through `pgfmath` but in this case, the coordinates must be calculated before using the macro `\tkzDefPoint`.



```
\begin{tikzpicture}[scale=.75]
\tkzInit[xmax=6,ymax=6]
\tkzGrid
\tkzSetUpPoint[shape = circle,color = red,%
size = 4,fill = red!30]
\tkzDefPoint(-1+1,-1+4){0}
\tkzDefPoint({3*ln(exp(1))},{exp(1)}){A}
\tkzDefPoint({4*sin(pi/6)},{4*cos(pi/6)}){B}
\tkzDefPoint({4*sin(pi/3)},{4*cos(pi/3)}){B'}
\tkzDefPoint[shift={(1,3)}](30:3){A'}
\tkzDrawPoints(0,A,B)
\tkzDrawPoints[color=red,shape=cross out](B',A')
\tkzLabelPoints(A,0,B,B',A')
\end{tikzpicture}
```

8.2.3 Scope and \tkzDefPoint

First, we can use the `scope` of TikZ. In the following example, we have a way to define an isosceles triangle.

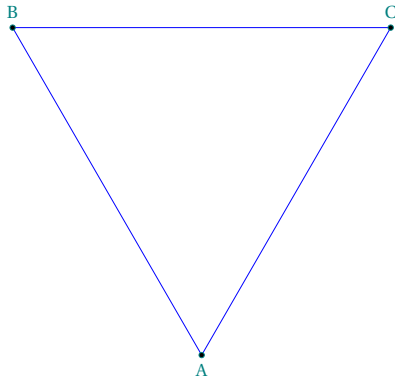

```

\begin{tikzpicture}[scale=1]
  \begin{scope}[rotate=30]
    \tkzDefPoint(2,3){A}
    \begin{scope}[shift=(A)]
      \tkzDefPoint(90:5){B}
      \tkzDefPoint(30:5){C}
    \end{scope}
  \end{scope}
  \tkzDrawSegments[color=blue](A,B B,C C,A)
  \tkzDrawPoints(A,B,C)
  \tkzLabelPoints[above](B,C)
  \tkzLabelPoints[below](A)
\end{tikzpicture}

```


8.3 Definition of points in Cartesian coordinates: `\tkzDefPoints`

```
\tkzDefPoints[local options]{(x1/y1/n1,x2/y2/n2, ...)}
```

x_1 and y_1 are the coordinates of a referenced point n_1

arguments	example
$x_i/y_i/n_i$	<code>\tkzDefPoints{0/0/0,2/2/A}</code>

8.3.1 Definition of points



```

\begin{tikzpicture}[scale=1]
  \tkzDefPoints{0/0/A,2/0/B,2/2/C,0/2/D}
  \tkzDrawSegments(D,A A,B B,C C,D)
  %with tkz-euclide \tkzDrawPolygon(A,...,D)
  \tkzDrawPoints(A,B,C,D)
\end{tikzpicture}

```

8.4 Point relative to another: `\tkzDefShiftPoint`


```
\tkzDefShiftPoint[<Point>](<x,y>){<name>} ou (<a:r>){<name>}
```

arguments	default	definition
(x,y)	no default	x and y are two dimensions, by default in cm.
(a:r)	no default	a is an angle in degrees, r is a dimension
point	no default	<code>\tkzDefShiftPoint[A](0:4){B}</code>

No options. The name of the point is mandatory.

8.4.1 Example with `\tkzDefShiftPoint`

This macro allows you to place one point relative to another. This is equivalent to a translation. Here is how to construct an isosceles triangle with main vertex A and angle at vertex of 30° .



```
\begin{tikzpicture}[rotate=-30]
\tkzDefPoint(2,3){A}
\tkzDefShiftPoint[A](0:4){B}
\tkzDefShiftPoint[A](30:4){C}
\tkzDrawSegments(A,B B,C C,A)
\tkzMarkSegments[mark=|,color=red](A,B A,C)
\tkzDrawPoints(A,B,C)
\tkzLabelPoints[above](A,C)
\tkzLabelPoints(B)
\end{tikzpicture}
```

8.5 Point relative to another: `\tkzDefShiftPointCoord`

`\tkzDefShiftPointCoord[⟨a,b⟩](⟨x,y⟩){⟨name⟩}` or `(⟨a:r⟩){⟨name⟩}`

This involves performing a (a,b) vector translation at the defined point relative to the origin.


arguments	default	definition
(x,y)	no default	x and y are two dimensions, by default in cm.
(a:r)	no default	a is an angle in degrees, r is a dimension

options	default	example
a,b	no default	<code>\tkzDefShiftPointCoord[2,3](0:4){B}</code>

The option is mandatory

8.5.1 Equilateral triangle with `\tkzDefShiftPointCoord`


Let's see how to get an equilateral triangle (there is much simpler)



```
\begin{tikzpicture}[scale=1]
\tkzDefPoint(2,3){A}
\tkzDefShiftPointCoord[2,3](30:4){B}
\tkzDefShiftPointCoord[2,3](-30:4){C}
\tkzDrawSegments(A,B B,C C,A)
% or \tkzDrawPolygon
\tkzDrawPoints(A,B,C)
\tkzLabelPoints(B,C)
\tkzLabelPoint[left](A){$A$}
\end{tikzpicture}
```

8.5.2 Isosceles triangle with `\tkzDefShiftPointCoord`

Let's see how to obtain an isosceles triangle with a principal angle of 30 degrees. Rotation is possible. $AB = AC = 5$ and \widehat{BAC}

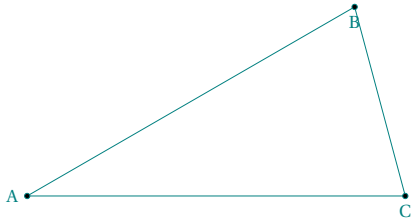

```
\begin{tikzpicture}[rotate=15]
\tkzDefPoint(2,3){A}
\tkzDefShiftPointCoord[2,3](15:5){B}
\tkzDefShiftPointCoord[2,3](-15:5){C}
\tkzDrawSegments(A,B B,C C,A)
\tkzDrawPoints(A,B,C)
\tkzLabelPoints(B,C)
\tkzLabelPoint[left](A){A}
\end{tikzpicture}
```

8.6 Drawing a point `\tkzDrawPoint`

`\tkzDrawPoint`[(local options)](`<point>`)

arguments	default	definition
point	no default	a name or reference is requested

The argument is mandatory, but it is not necessary (although recommended) to use a reference; a pair of coordinates placed between braces is accepted. The disk takes the color of the circle, but 50% lighter. It is possible to modify everything. The point is a node and is therefore invariant if the drawing is modified by scaling..

options	default	definition
shape	circle	Possible cross or cross out
size	2 pt	disk size
color	black	the default color can be changed

We can create other forms such as **cross**


8.6.1 Default stitch style

```
• \begin{tikzpicture}
\tkzDefPoint(1,3){A}
\tkzDrawPoint(A)
\end{tikzpicture}
```

8.6.2 Changing the style

The default definition is in the file `tkz-base.cfg`

```
\tikzset{point style/.style={draw = \tkz@euc@pointcolor,
inner sep = 0pt,
shape = \tkz@euc@pointshape,
minimum size = \tkz@euc@pointsize,
fill = \tkz@euc@pointcolor!50}}
```

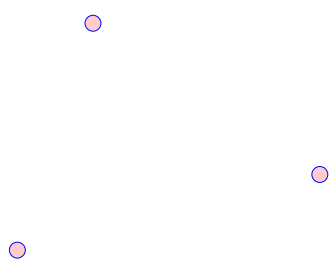


```

\begin{tikzpicture}
\tkzset{point style/.style={%
draw = blue,
inner sep = 0pt,
shape = circle,
minimum size = 6pt,
fill = red!20}}
\tkzDefPoint(1,3){A}
\tkzDefPoint(4,1){B}
\tkzDefPoint(0,0){O}
\tkzDrawPoint(A)
\tkzDrawPoint(B)
\tkzDrawPoint(O)
\end{tikzpicture}

```

8.6.3 Example of point plots

Note that `scale` does not affect the shape of the dots. Which is normal. Most of the time, we are satisfied with a single point shape that we can define from the beginning, either with a macro or by modifying a configuration file.



```

\begin{tikzpicture}[scale=.5]
\tkzDefPoint(1,3){A}
\tkzDefPoint(4,1){B}
\tkzDefPoint(0,0){O}
\tkzDrawPoint[shape=cross out,size=12,color=red](A)
\tkzDrawPoint[shape=cross,size=12,color=blue](B)
\tkzDrawPoint[size=12,color=green](O)
\tkzDrawPoint[size=12,color=blue,fill=yellow]({2,2})
\end{tikzpicture}

```

It is possible to draw several points at once, but this macro is a little slower than the previous one. Moreover, we have to make do with the same options for all the points.


8.7 Drawing points `\tkzDrawPoints`

```
\tkzDrawPoints[(local options)]((liste))
```

arguments	default	definition
points list	no default	example <code>\tkzDrawPoints(A,B,C)</code>

Warning at the final "s", an oversight leads to cascading errors if you attempt to plot multiple points. The options are the same as for the previous macro.

8.7.1 Example with `\tkzDefPoint` and `\tkzDrawPoints`




```

\begin{tikzpicture}[scale=.5]
\tkzDefPoint(1,3){A}
\tkzDefPoint(4,1){B}
\tkzDefPoint(0,0){O}
\tkzDrawPoints[size=8,color=red](A,B,O)
\end{tikzpicture}

```

8.7.2 More complex example

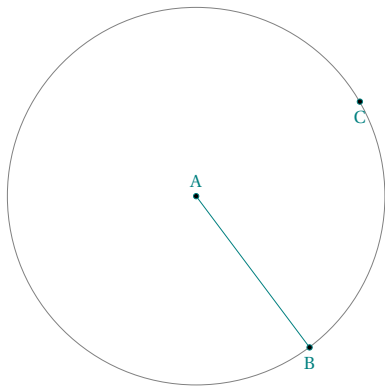

```

\begin{tikzpicture}[scale=.5]
  \tkzDefPoint(2,3){A}  \tkzDefPoint(5,-1){B}
  \tkzDefPoint[label=below:\mathcal{C}$,
               shift={(2,3)}]{-30:5.5}{E}
  \begin{scope}[shift=(A)]
    \tkzDefPoint(30:5){C}
  \end{scope}
  \tkzDrawCircle(A,B)
  \tkzDrawSegment(A,B)
  \tkzDrawPoints(A,B,C)
  \tkzLabelPoints(B,C)
  \tkzLabelPoints[above](A)
\end{tikzpicture}


```

8.8 Add a label to a point `\tkzLabelPoint`

It is possible to add several labels at the same point by using this macro several times.

<code>\tkzLabelPoint[(local options)](point){label}</code>	
arguments	example
point	<code>\tkzLabelPoint(A){\$A_1\$}</code>
options	default definition
TikZ options	colour, position etc.

Optionally, we can use any style of TikZ, especially placement with above, right, dots...

8.8.1 Example with `\tkzLabelPoint`


```

\begin{tikzpicture}
  \tkzDefPoint(0,0){A}
  \tkzDefPoint(4,0){B}
  \tkzDefPoint(0,3){C}
  \tkzDrawSegments(A,B B,C C,A)
  \tkzDrawPoints(A,B,C)
  \tkzLabelPoint[left,red](A){$A$}
  \tkzLabelPoint[right,blue](B){$B$}
  \tkzLabelPoint[above,purple](C){$C$}
\end{tikzpicture}

```

8.8.2 Label and reference

The reference of a point is the object that allows to use the point, the label is the name of the point that will be displayed.



```
\begin{tikzpicture}
  \tkzInit [xmax=1,xstep=0.15,ymax=.5]
  \tkzAxeX \tkzDrawY [noticks]
  \tkzDefPoint(0.22,0.25){A}
  \tkzDrawPoint(A)
  \tkzLabelPoint [above] (A){$A_1$}
\end{tikzpicture}
```

8.9 Add labels to points `\tkzLabelPoints`

It is possible to place several labels quickly when the point references are identical to the labels and when the labels are placed in the same way in relation to the points. By default, `below right` is chosen.

<code>\tkzLabelPoints[⟨local options⟩](⟨A₁,A₂,...⟩)</code>		
arguments	example	result
list of points	<code>\tkzLabelPoints(A,B,C)</code>	Display of A, B and C

This macro reduces the number of lines of code, but it is not obvious that all points need the same label positioning.

8.9.1 Example with `\tkzLabelPoints`

```
\begin{tikzpicture}
  \tkzDefPoint(2,3){A}
  \tkzDefShiftPoint [A] (30:2){B}
  \tkzDefShiftPoint [A] (30:5){C}
  \tkzDrawPoints(A,B,C)
  \tkzLabelPoints(A,B,C)
\end{tikzpicture}
```


8.10 Automatic position of labels `\tkzAutoLabelPoints`

The label of a point is placed in a direction defined by a `center` and a point. The distance to the point is determined by a percentage of the distance between the center and the point. This percentage is given by `dist`.

<code>\tkzLabelPoints[⟨local options⟩](⟨A₁,A₂,...⟩)</code>		
arguments	example	result
list of points	<code>\tkzLabelPoint(A,B,C)</code>	Display of A, B and C
options	default	definition
<code>center</code>	no default	you need to deisgn a center
<code>dist</code>	0.15	percentage change in the distance between the center and the points

8.10.1 Example 1 with `\tkzAutoLabelPoints`


Here the points are positioned relative to the center of gravity of A, B, C et O.



```
\begin{tikzpicture}[scale=1.25]
  \tkzDefPoint(2,1){O}
  \tkzDefRandPointOn[circle=center O radius 1.5]
  \tkzGetPoint{A}
  \tkzDrawCircle(O,A)
  \tkzDefPointBy[rotation=center O angle 100](A)
  \tkzGetPoint{C}
  \tkzDefPointBy[rotation=center O angle 78](A)
  \tkzGetPoint{B}
  \tkzDrawPoints(O,A,B,C)
  \tkzDrawSegments(C,B B,A A,O O,C)
  \tkzDefCentroid(A,B,C,O)
  \tkzDrawPoint(tkzPointResult)
  \tkzAutoLabelPoints[center=tkzPointResult,
    dist=.3,red](O,A,B,C)
\end{tikzpicture}
```

8.10.2 Example 2 with `\tkzAutoLabelPoints`

This time the reference is O and the distance is by default 0.15.




```
\begin{tikzpicture}[scale=1.25]
  \tkzDefPoint(2,1){O}
  \tkzDefRandPointOn[circle=center O radius 1.5]
  \tkzGetPoint{A}
  \tkzDrawCircle(O,A)
  \tkzDefPointBy[rotation=center O angle 100](A)
  \tkzGetPoint{C}
  \tkzDefPointBy[rotation=center O angle 78](A)
  \tkzGetPoint{B}
  \tkzDrawPoints(O,A,B,C)
  \tkzDrawSegments(C,B B,A A,O O,C)
  \tkzAutoLabelPoints[center=O,red](A,B,C)
\end{tikzpicture}
```

8.11 Point style with `\tkzSetUpPoint`


It is important to understand that the size of a dot depends on the size of a line.

<code>\tkzSetUpPoint</code> [<i>(local options)</i>]		
options	default	definition
shape	circle	possible: circle, cross, cross out
size	current	the size of the point is size * line width
color	current	
fill	current!50	

This is a macro for choosing a style for points.

8.11.1 Simple example with `\tkzSetUpPoint`


```
\begin{tikzpicture}
  \tkzSetUpPoint[shape = cross out,
                color=blue]
  \tkzInit[xmax=100,xstep=20,ymax=.5]
  \tkzDefPoint(20,1){A}
  \tkzDefPoint(80,0){B}
  \tkzDrawLine(A,B)
  \tkzDrawPoints(A,B)
\end{tikzpicture}
```

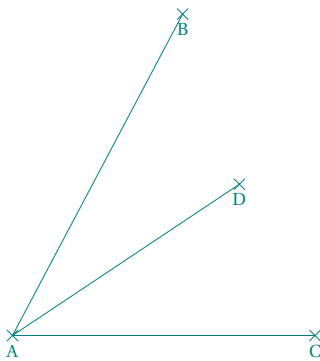8.11.2 Second example with `\tkzSetUpPoint`

```
\begin{tikzpicture}
  \tkzInit[ymin=-0.5,ymax=3,xmin=-0.5,xmax=7]
  \tkzDefPoint(0,0){A}
  \tkzDefPoint(02.25,04.25){B}
  \tkzDefPoint(4,0){C}
  \tkzDefPoint(3,2){D}
  \tkzDrawSegments(A,B A,C A,D)
  \tkzSetUpPoint[shape=cross out,size=4,]
  \tkzDrawPoints(A,B,C,D)
  \tkzLabelPoints(A,B,C,D)
\end{tikzpicture}
```

8.11.3 Using `\tkzSetUpPoint` in a group

Only the points in the group are affected by the changes.

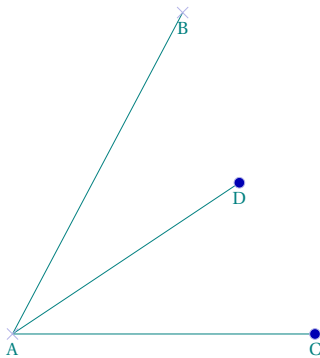

```
\begin{tikzpicture}
  \tkzInit[ymin=-0.5,ymax=3,xmin=-0.5,xmax=7]
  \tkzDefPoint(0,0){A}
  \tkzDefPoint(02.25,04.25){B}
  \tkzDefPoint(4,0){C}
  \tkzDefPoint(3,2){D}
  \tkzDrawSegments(A,B A,C A,D)
  {\tkzSetUpPoint[shape=cross out,
                fill= blue!70!black!!50,
                size=4,color=blue!70!black!30]
  \tkzDrawPoints(A,B)}
  \tkzSetUpPoint[fill= blue!70!black!!50,size=4,
                color=blue!70!black!30]
  \tkzDrawPoints(C,D)
  \tkzLabelPoints(A,B,C,D)
\end{tikzpicture}
```

8.12 Show point coordinates

This macro allows you to display the coordinates of a point and to draw arrows to specify the abscissa and ordinate. The point is given by its reference (its name). It is possible to give a couple of coordinates.


<code>\tkzPointShowCoord[⟨local options⟩](⟨point⟩)</code>		
argument	example	explanation
<code>(⟨ref⟩)</code>	<code>\tkzPointShowCoord(A)</code>	shows the coordinates of point A
option	default	explanation
<code>xlabel</code>	empty	label abscissa
<code>xstyle</code>	empty	style for the abscissa label node example <code>text=red</code>
<code>noxdraw</code>	false	boolean for not draw an arrow to the X-axis (<code>x'x</code>)
<code>ylabel</code>	empty	idem
<code>ystyle</code>	empty	idem
<code>noydraw</code>	false	idem

8.12.1 Default styles


Here are some of the main styles:

```
\tikzset{arrow coord style/.style={dashed,
    \tkz@euc@linecolor,
    >=latex',
    ->}}
\tikzset{xcoord style/.style={\tkz@euc@labelcolor,
    font=\normalsize,text height=1ex,
    inner sep = 0pt,
    outer sep = 0pt,
    fill=\tkz@fillcolor,
    below=3pt}}
\tikzset{ycoord style/.style={\tkz@euc@labelcolor,
    font=\normalsize,text height=1ex,
    inner sep = 0pt,
    outer sep = 0pt,
    fill=\tkz@fillcolor,
    left=3pt}}
```

8.12.2 Example with `\tkzPointShowCoord`

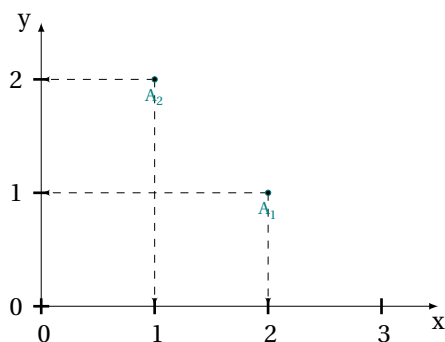

```
\begin{tikzpicture}[scale=1.5]
\tkzInit[xmax=3,ymax=2]
\tkzAxeXY
\tkzDefPoint(2,1){a}
\tkzPointShowCoord(a)
\tkzDrawPoint(a)
\tkzLabelPoint(a){$A_1$}
\tkzPointShowCoord({1,2})
\tkzDrawPoint({1,2})
\tkzLabelPoint({1,2}){$A_2$}
\end{tikzpicture}
```

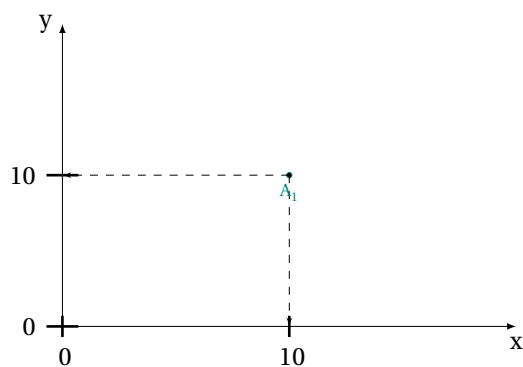8.12.3 Example with `\tkzPointShowCoord` and `xstep`

```
\begin{tikzpicture}[xscale=3,yscale=2]
\tkzInit[xmax=15,ymax=15,
xstep=10,ystep=10]
\tkzAxeXY
\tkzDefPoint(10,10){a} \tkzDrawPoint(a)
\tkzPointShowCoord(a)
\tkzLabelPoint(a){$A_1$}
\end{tikzpicture}
```


8.13 `\tkzDefSetOfPoints`

It was already possible to create a scatter plot with the macro `\tkzDefPoints`, but this requires making a reference (a name) to each point, which is sometimes tedious. The macro `\tkzSetOfPoints` allows to define points `tkzPt1`, `tkzPt2`, etc.

This is frequently referred to as "scatter plot". The difference from the macro `\tkzDefPoints` is that the reference to the points is given by a prefix (default `tkzPt`) and the point number. The points are not drawn.

```
\tkzDefSetOfPoints[<local options>]{<x1/y1,x2/y2,...,xn/yn>}
```

arguments	default	definition
x_n/y_n	no default	List of couples x_n/y_n separated by commas
options	default	definition
prefix	<code>tkzPt</code>	prefix for point names

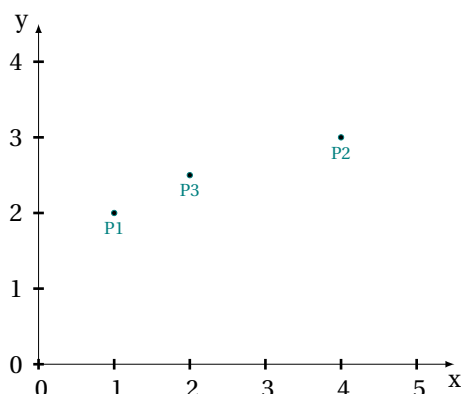8.13.1 Creating a scatter plot with `\tkzDefSetOfPoints`

```
\begin{tikzpicture}
\tkzInit[ymax=4,xmax=5]
\tkzAxeXY
\tkzDefSetOfPoints[prefix=P]%
{1/2,4/3,2/2.5}
\tkzDrawPoints(P1,P2,P3)
\tkzLabelPoints(P1,P2,P3)
\end{tikzpicture}
```


9 Style Use

9.1 Modification of `tkz-base`

`tkz-base.sty` has a default configuration file. Its existence is not mandatory, but if it exists, you can modify it to get different default styles. I only give a quick description of this file, as it may evolve soon.

In `tkz-base.cfg`, you can set the axes, the reference (if used), the grid, etc. as well as the styles which are linked to these objects. It is possible to modify the styles of the points and segments.

It is also possible to define the dimensions of a drawing by default by modifying `xmin`, `xmax`, `ymin` and `ymax`.

```
\def\tkz@xa{0}
\def\tkz@xb{10}
\def\tkz@ya{0}
\def\tkz@yb{10}
```

These lines are used to define the values of `xmin`, `xmax`, etc.

You can change them, for example:

```
\def\tkz@xa{-5}
\def\tkz@xb{-5}
\def\tkz@ya{5}
\def\tkz@yb{5}
```

Here's a list of used styles you'll find in `tkz-base.cfg`

- xlabel style
- xaxe style
- ylabel style
- yaxe style
- rep style
- line style
- point style
- mark style
- compass style
- vector style
- arrow coord style
- xcoord style
- ycoord style


9.2 Use `\tikzset`

It's better to use `\tikzset` now rather than `\tikzstyle` and it's possible to use `tkz-base.cfg`.

If you want to change the appearance of the axes of the orthogonal coordinate system, for example place arrows at each end or remove them. This can be done in `tkz-base.cfg` or in your code.

```
\tikzset{xaxe style/.style = {>=latex,<->}}
```

The transformation will be valid for the entire document. Note that `xmin` has been modified, in fact the arrow and the line corresponding to the graduation merge.



```
\tikzset{xaxe style/.style = {<->}}
\tikzset{xlabel style/.style={below=6pt}}
\begin{tikzpicture}
  \tkzInit[xmin=-0.5,xmax=5]
  \tkzDrawX
  \tkzLabelX
\end{tikzpicture}
```

10 Controlling Bounding Box

From the **PgfManual**: "When you add the clip option, the current path is used for clipping subsequent drawings. Clipping never enlarges the clipping area. Thus, when you clip against a certain path and then clip again against another path, you clip against the intersection of both. The only way to enlarge the clipping path is to end the pgfscope in which the clipping was done. At the end of a pgfscope the clipping path that was in force at the beginning of the scope is reinstalled."

First of all, you don't have to deal with TikZ the size of the bounding box. Early versions of `tkz-euclide` did not control the size of the bounding box, now with `tkz-base 4` the size of the bounding box is limited.

The initial bounding box after using the macro `\tkzInit` is defined by the rectangle based on the points (0,0) and (10,10). The `\tkzInit` macro allows this initial bounding box to be modified using the arguments (`xmin`, `xmax`, `ymin`, and `ymax`). Of course any external trace modifies the bounding box. TikZ maintains that bounding box. It is possible to influence this behavior either directly with commands or options in TikZ such as a command like `\useasboundingbox` or the option `use as bounding box`. A possible consequence is to reserve a box for a figure but the figure may overflow the box and spread over the main text. The following command `\pgfresetboundingbox` clears a bounding box and establishes a new one.

10.1 Utility of `\tkzInit`

However, it is sometimes necessary to control the size of what will be displayed. To do this, you need to have prepared the bounding box you are going to work in, this is the role of the macro `\tkzInit`. For some drawings, it is interesting to fix the extreme values (`xmin`, `xmax`, `ymin` and `ymax`) and to "clip" the definition rectangle in order to control the size of the figure as well as possible.

The two macros that are useful for controlling the bounding box:

- `\tkzInit`
- `\tkzClip`

To this, I added macros directly linked to the bounding box. You can now view it, backup it, restore it (see the section Bounding Box).

10.2 `\tkzInit`

<code>\tkzInit[⟨local options⟩]</code>		
options	default	definition
<code>xmin</code>	0	minimum value of the abscissae in cm
<code>xmax</code>	10	maximum value of the abscissae in cm
<code>xstep</code>	1	difference between two graduations in x
<code>ymin</code>	0	minimum y-axis value in cm
<code>ymax</code>	10	maximum y-axis value in cm
<code>ystep</code>	1	difference between two graduations in y


The role of `\tkzInit` is to define a **orthogonal** coordinates system and a rectangular part of the plane in which you will place your drawings using Cartesian coordinates. This macro allows you to define your working environment as with a calculator. With `tkz-base 4` `\xstep` and `\ystep` are always 1. Logically it is no longer useful to use `\tkzInit`, except for an action like "Clipping Out".

10.3 `\tkzClip`10.4 `tkzClip`

<code>\tkzClip[⟨local options⟩]</code>		
The role of this macro is to make invisible what is outside the rectangle defined by $(x_{\min}; y_{\min})$ and $(x_{\max}; y_{\max})$.		
options	default	definition
<code>space</code>	<code>1</code>	added value on the right, left, bottom and top of the background

The role of the `space` option is to enlarge the visible part of the drawing. This part becomes the rectangle defined by $(x_{\min}-space; y_{\min}-space)$ and $(x_{\max}+space; y_{\max}+space)$. `space` can be negative! The unit is cm and should not be specified.

The role of this macro is to "clip" the initial rectangle so that only the paths contained in this rectangle are drawn.

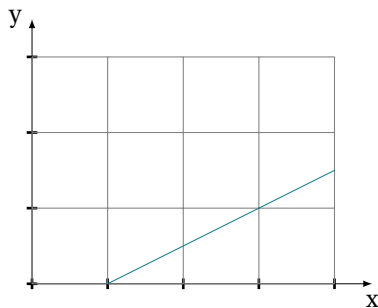


```
\begin{tikzpicture}
\tkzInit[xmax=4, ymax=3]
\tkzDefPoints{-1/-1/A,5/2/B}
\tkzDrawX \tkzDrawY
\tkzGrid
\tkzClip
\tkzDrawSegment(A,B)
\end{tikzpicture}
```

It is possible to add a bit of space

```
\tkzClip[space=1]
```

10.5 `\tkzClip` and the option `space`

This option allows you to add some space around the "clipped" rectangle.

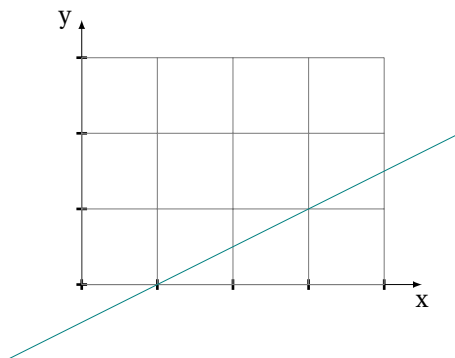

```
\begin{tikzpicture}
\tkzInit[xmax=4, ymax=3]
\tkzDefPoints{-1/-1/A,5/2/B}
\tkzDrawX \tkzDrawY
\tkzGrid
\tkzClip[space=1]
\tkzDrawSegment(A,B)
\end{tikzpicture}
```

The dimensions of the "clipped" rectangle are $x_{\min}-1$, $y_{\min}-1$, $x_{\max}+1$ and $y_{\max}+1$.


10.6 tkzShowBB

The simplest macro.

```
\tkzShowBB[⟨local options⟩]
```

This macro displays the bounding box. A rectangular frame surrounds the bounding box. This macro accepts TikZ options.

10.6.1 Example with \tkzShowBB




```
\begin{tikzpicture}[scale=.5]
  \tkzInit[ymax=5,xmax=8]
  \tkzGrid
  \tkzDefPoint(3,0){A}
  \begin{scope}
    \tkzClipBB
    \tkzDefCircle[R](A,5)
    \tkzDrawCircle(A,t kzPointResult)
    \tkzShowBB[line width = 4pt,fill=teal!10,opacity=.4]
  \end{scope}
  \tkzDefCircle[R](A,4)
  \tkzDrawCircle(A,t kzPointResult)
\end{tikzpicture}
```

10.7 tkzClipBB

```
\tkzClipBB
```

The idea is to limit future constructions to the current bounding box.

10.7.1 Example with \tkzClipBB and the bisectors

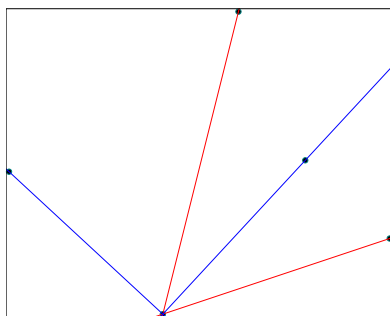

```
\begin{tikzpicture}
  \tkzInit[xmin=-3,xmax=6, ymin=-1,ymax=6]
  \tkzDefPoint(0,0){O}\tkzDefPoint(3,1){I}
  \tkzDefPoint(1,4){J}
  \tkzDefLine[bisector](I,0,J) \tkzGetPoint{i}
  \tkzDefLine[bisector out](I,0,J) \tkzGetPoint{j}
  \tkzDrawPoints(O,I,J,i,j)
  \tkzClipBB
  \tkzDrawLines[add = 1 and 2,color=red](O,I O,J)
  \tkzDrawLines[add = 1 and 2,color=blue](O,i O,j)
  \tkzShowBB
\end{tikzpicture}
```

11 Use Additional Objects or Tools

These complementary objects can be particular points, straight lines, circles, arcs, etc. Now `tkz-base` has been minimized. If you want to use particular objects you must use `tkz-euclide`.

12 Using an orthogonal coordinate system

12.1 Coordinate system with `\tkzRep`

<code>\tkzRep[⟨local options⟩]</code>		
options	default	definition
<code>line width</code>	<code>0.8pt</code>	line width defines the width of the line
<code>xlabel</code>	\vec{i}	label for the abscissa axis
<code>ylabel</code>	\vec{j}	label for the ordinate axis
<code>posxlabel</code>	<code>below=2pt</code>	Label position
<code>posylabel</code>	<code>left=2pt</code>	Label position
<code>xnorm</code>	<code>1</code>	norm of the x-vector
<code>ynorm</code>	<code>1</code>	vector norm in y
<code>color</code>	<code>black</code>	line colour
<code>colorlabel</code>	<code>black</code>	label color


12.1.1 Some modifiable styles

```

\tikzset{xlabel style/.style           = {below      = 3 pt,
                                     inner sep    = 1pt,
                                     outer sep    = 0pt}}
\tikzset{ylabel style/.style           = {left       = 3 pt,
                                     inner sep    = 1pt,
                                     outer sep    = 0pt}}
\tikzset{xaxe style/.style              = {>         = latex, ->}}
\tikzset{yaxe style/.style              = {>         = latex, ->}}

```

12.1.2 Example of use

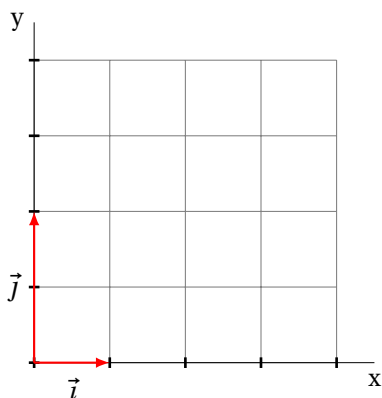

```


\begin{tikzpicture}
  \tikzset{xaxe style/.style={-}}
  \tikzset{yaxe style/.style={-}}
  \tkzInit[xmax=4,ymax=4]
  \tkzGrid
  \tkzDrawX
  \tkzDrawY
  \tkzRep[color=red,ynorm=2]
\end{tikzpicture}

```

For those who use `french` with `babel`, in case of problems with version 3 of `pgf`, just load the `babel` library. TikZ was indeed sometimes allergic to the active characters.


13 Lines parallel to the axes

13.1 Draw a horizontal line with `\tkzHLine`


 The syntax is that of `xfp`!

<code>\tkzHLine[⟨local options⟩]{⟨decimal number⟩}</code>		
arguments	example	definition
decimal number	<code>\tkzHLine{1}</code>	Draw the straight line $y=1$
options	default	definition
color	black	line colour
line width	0.6pt	point thickness
style	solid	line style
see the lines options in TikZ		

13.1.1 Horizontal line

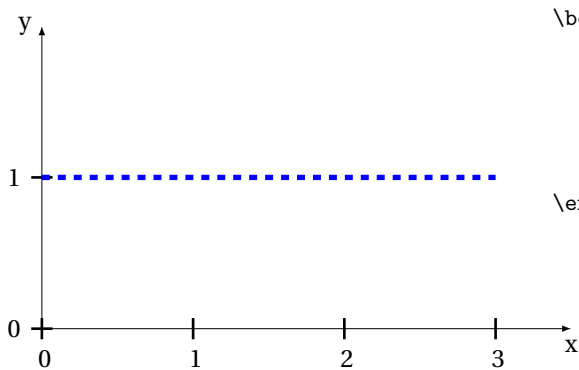


```
\begin{tikzpicture}[scale=2]
  \tkzInit[xmax=3,ymax=1.5]
  \tkzAxeXY
  \tkzHLine[color = blue,
            style = dashed,
            line width = 2pt]{1}
\end{tikzpicture}
```

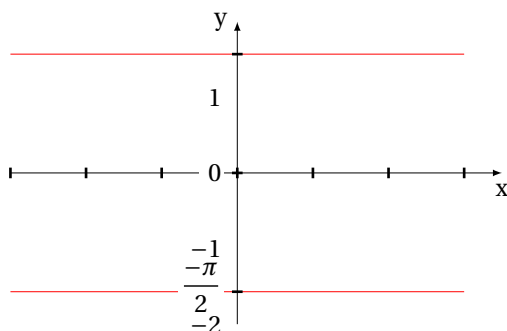13.1.2 Horizontal line and value calculated by `xfp`


```
\begin{tikzpicture}
  \tkzInit[xmin=-3,xmax=3,ymin=-2,ymax=1.5]
  \foreach \v in {-1,1}
  {\tkzHLine[color=red]{\v*pi/2}}
  \tkzDrawX
  \tkzAxeY[trig=2]
  \tkzLabelY
\end{tikzpicture}
```


13.2 Horizontal lines with `\tkzHLines`

 The syntax is that of `xfp`!


<code>\tkzHLines[⟨local options⟩]{⟨list of values⟩}</code>		
arguments	example	definition
list of values	<code>\tkzHLines{1,4}</code>	draws the lines $y=1$ and $y=4$

13.2.1 Horizontal lines

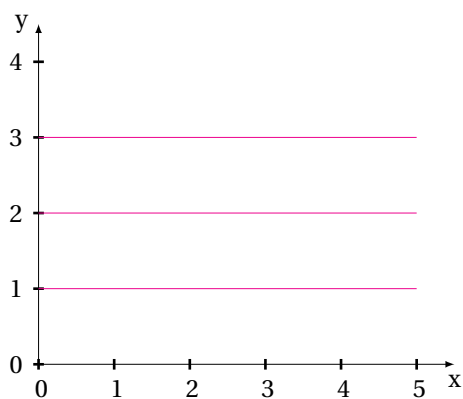

```
\begin{tikzpicture}
  \tkzInit[xmax=5,ymax=4]
  \tkzAxeXY
  \tkzHLines[color = magenta]{1,...,3}
\end{tikzpicture}
```


13.3 Draw a vertical line with `\tkzVLine`

 The syntax is that of `xfp`!

<code>\tkzVLine[⟨local options⟩]{⟨decimal number⟩}</code>		
arguments	example	definition
decimal number	<code>\tkzVLine{1}</code>	Draw the line $x=1$
options	default	definition
color	black	line colour
line width	0.6pt	point thickness
style	solid	line style


See options the lines in TikZ.

13.3.1 Vertical line

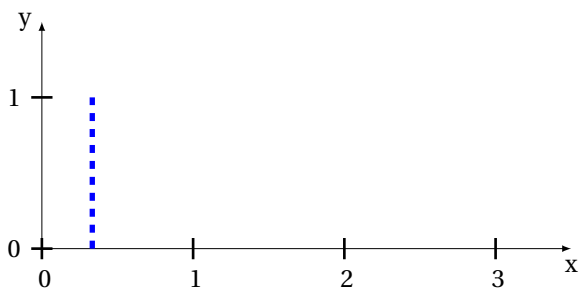


```
\begin{tikzpicture}[scale=2]
  \tkzInit[xmax=3,ymax=1]
  \tkzAxeXY
  \tkzVLine[color = blue,
             style = dashed,
             line width = 2pt]{1/3}
\end{tikzpicture}
```

13.3.2 Vertical line and value calculated by xfp

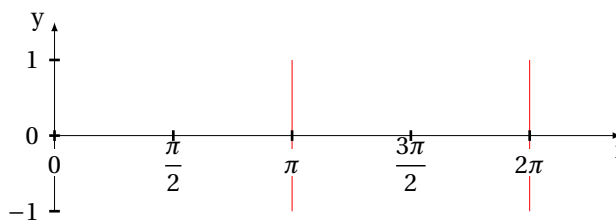


```
\begin{tikzpicture}
  \tkzInit[xmax=7,ymin=-1,ymax=1]
  \foreach \v in {1,2}
  {\tkzVLine[color=red]{\v*pi}}
  \tkzDrawY
  \tkzAxeX[trig=2]
  \tkzLabelY
\end{tikzpicture}
```

13.4 Vertical lines with \tkzVLines

 The syntax is that of xfp!

\tkzVLines[⟨local options⟩]{⟨list of values⟩}		
arguments	example	definition
list of values	\tkzVLines{1,4}	Trace the lines $x=1$ and $x=4$

13.4.1 Vertical lines

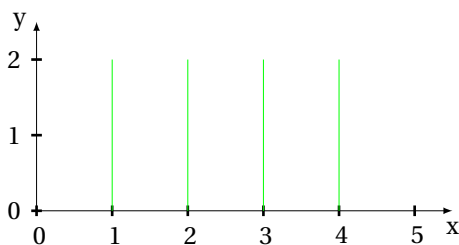

```
\begin{tikzpicture}
  \tkzInit[xmax=5,ymax=2]
  \tkzAxeXY
  \tkzVLines[color = green]{1,2,...,4}
\end{tikzpicture}
```


14 Ticks on the axes

14.1 Drawing one tick on the abscissa axis \tkzHTick

<code>\tkzHTick[⟨local options⟩]{⟨decimal number⟩}</code>		
arguments	example	definition
decimal number	<code>\tkzHTick{1}</code>	the abscissa of the tick is 1
options	default	definition
mark	*	full disk
mark size	3 pt	symbol size
mark options	empty	allows you to use color for example

See options for TikZ.

14.1.1 Example



```

\begin{tikzpicture}
  \tkzInit[xmax=6]
  \tkzDrawX
  \tkzHTick[mark=ball,mark size=3pt]{pi/2}
  \tkzHTick[mark=*,
    mark options={color=purple}]{2*exp(1)}
\end{tikzpicture}

```

14.2 Drawing ticks on the abscissa axis `\tkzHTicks`

<code>\tkzHTicks[⟨local options⟩]{⟨list of numbers⟩}</code>		
arguments	example	definition
decimal number	<code>\tkzHTicks{1}</code>	the abscissa of the tick is 1

See options for TikZ.

14.3 Drawing one tick on the ordinate axis `\tkzVTick`

<code>\tkzVTick[⟨local options⟩]{⟨decimal number⟩}</code>		
arguments	example	definition
decimal number	<code>\tkzVTick{1}</code>	the ordinate of the tick is 1

See options for TikZ.

14.4 Drawing ticks on the ordinate axis `\tkzVTicks`

```
\tkzVTicks[⟨local options⟩]{⟨decimal number⟩}
```

arguments	example	definition
-----------	---------	------------

decimal number	<code>\tkzVTicks{1,3}</code>	the ordinates of the ticks are 1 and 3
----------------	------------------------------	--

See options for TikZ.

15 Marks or symbols

I distinguished between the points used in Euclidean geometry and the "marks or symbols" that can be found in statistics.

To position the symbol, we use the macro `\tkzDefPoint` to correctly define a point, then the macro `\tkzDrawMark` to draw the symbol.

It is common to have to draw a scatter plot, so I created a macro that allows you to define several points quickly.

A "mark" symbol can be scaled, which is sometimes useful, but, on the other hand, if you change the abscissa and ordinates differently then the "marks" are distorted.

Reminder: it was already possible to create a cloud of points with the macro `\tkzDefPoints`, but this requires to give a reference (a name) to each point, which is sometimes tedious. The macro `\tkzSetOfPoints` allows to define points `tkzPt1`, `tkzPt2`, etc.

This is frequently referred to as the "scatter plot". The difference from the macro `\tkzDefPoints` is that the reference to the points is given by a prefix (default `tkzPt`) and the point number.


The points are not drawn.

15.1 `\tkzDrawSetOfPoints`

```
\tkzDrawSetOfPoints [<local options>]
```

Allows you to place symbols on the points defined by `\tkzDefSetOfPoints`.

options	default	definition
prefix	<code>tkzPt</code>	point name prefix

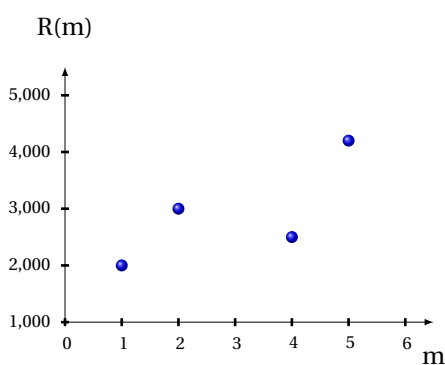15.1.1 Drawing of a scatter plot with `\tkzDrawSetOfPoints`


```
\begin{tikzpicture}[scale=0.75]
\tkzInit[xmax=6,ymin=1000,ymax=5000,ystep=1000]
\tkzDrawX[label=$m$,below=10pt]
\tkzDrawY[label=$R(m)$,above=10pt]
\tkzLabelX[font=\scriptsize]
\tkzLabelY[font=\scriptsize]
\tkzDefSetOfPoints[show]{1/2000,2/3000,4/2500,5/4200}
\tkzDrawSetOfPoints[mark=ball,mark size=3pt]
\end{tikzpicture}
```

15.2 `\tkzJoinSetOfPoints`

```
\tkzJoinSetOfPoints [<local options>]
```


Allows the symbols to be joined by line segments. Of course, it is possible to use all the options of TikZ.

options	default	definition
prefix	<code>tkzPt</code>	point name prefix

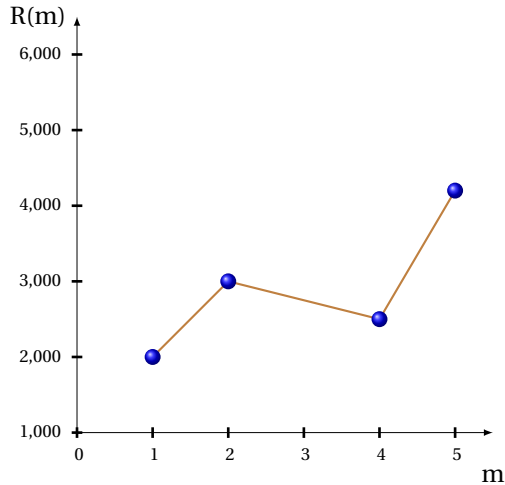15.2.1 Link the points of a scatter plot with `\tkzJoinSetOfPoints`

```
\begin{tikzpicture}[scale=1]
\tkzInit[xmax=5,ymin=1000,ymax=6000,ystep=1000]
\tkzDrawX[label=$m$,below=13pt]
\tkzDrawY[label=$R(m)$]
\tkzLabelX[font=\scriptsize]
\tkzLabelY[font=\scriptsize]
\tkzDefSetOfPoints{%
  1/2000,2/3000,4/2500,5/4200}
\tkzJoinSetOfPoints[%
  thick, color=brown]
\tkzDrawSetOfPoints[%
  mark=ball, mark size=3pt]
\end{tikzpicture}
```

15.2.2 Using the points of a scatter plot




```
\begin{tikzpicture}[scale=.5]
\tkzInit[xmax=5,ymin=1000,
  ymax=6000,ystep=1000]
\tkzGrid[color=orange!30]
\tkzDrawX[label=$m$,below=13pt]
\tkzDrawY[label=$R(m)$]
\tkzLabelX[font=\scriptsize]
\tkzLabelY[font=\scriptsize]
\tkzDefSetOfPoints[prefix=P]{%
  1/2000,2/3000,3/2000,4/2500,5/4200}
\tkzDrawPolySeg[%
  color=brown!50,
  line width=2pt](P1,P2,P3,P4,P5)
\end{tikzpicture}
```

15.3 `\tkzSetUpMark`

```
\tkzSetUpMark[<local options>]
```

options	default	example
mark	no default	<code>\tkzSetUpMark[mark=heart]</code>

15.3.1 Two scatter plots

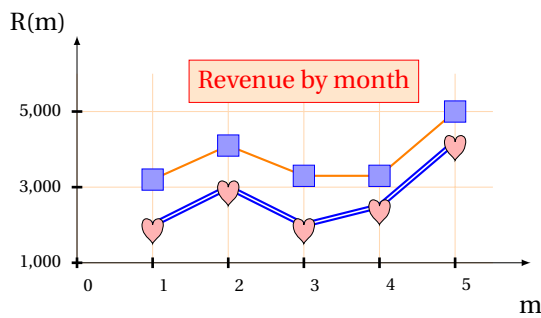

```

\begin{tikzpicture}
\tkzInit[xmax=5.5,ymin=1000,%
ymax=6000,ystep=2000]
\tkzGrid[color=orange!30]
\tkzDrawX[label=$m$,below=13pt]
\tkzDrawY[above left,label=$R(m)$]
\tkzLabelX[below right,font=\scriptsize]
\tkzLabelY[font=\scriptsize]
\tkzDefSetOfPoints{1/2000,2/3000,3/2000,
4/2500,5/4200}
\tkzDefSetOfPoints[prefix=P]{1/3200,2/4100,
3/3300,4/3300,5/5000}
\tkzSetUpMark[mark=heart,color=black,
fill=red!30,size=4pt]
\tkzJoinSetOfPoints[thick,color=blue,double]
\tkzDrawSetOfPoints
\tkzJoinSetOfPoints[prefix=P,thick,color=orange]
\tkzDrawSetOfPoints[prefix=P,mark=square*,
mark size=4pt,
mark options={color=blue,fill=blue!40}]
\tkzText[draw,color = red,
fill = orange!20](3,5800)%
{Revenue by month}
\end{tikzpicture}

```


15.4 \tkzDrawMark

```
\tkzDrawMark[(local options)]((point))
```

Place a symbol. More efficient than the next to place a single symbol.

options	default	definition
prefix	tkzPt	point name prefix

15.4.1 Ball; use of \tkzDrawMarks



```

\begin{tikzpicture}
\tkzInit[xmax=3,ymax=1]
\tkzAxeXY
\tkzDrawMark[mark=ball](1,.5)
\end{tikzpicture}

```


15.5 \tkzDrawMarks

```
\tkzDrawMarks[(local options)]((list of points))
```

Allows you to place a series of marks.

options	default	definition
prefix	tkzPt	point name prefix

15.5.1 Mark and plot; use of `\tkzDrawMarks`

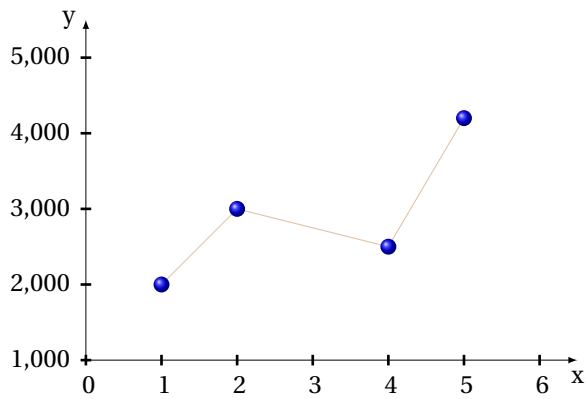

```

\begin{tikzpicture}
\tkzInit[xmax=6,ymin=1000,
         ymax=5000,ystep=1000]
\tkzAxeXY
\tkzDefSetOfPoints[prefix=P]{%
    1/2000,
    2/3000,
    4/2500,
    5/4200}
\tkzDrawSegments[color=brown!50]%
(P1,P2 P2,P3 P3,P4)
\tkzDrawMarks[mark=ball](P1,P2,P3,P4)
\end{tikzpicture}

```


16 Texts and Legends

16.1 Placing a title

Of course you can use TikZ, but the macro I propose to allow you to place the text using the units chosen for the drawing.


The options are always those of TikZ, in particular the following ones:

```
\tkzText[⟨local options⟩](⟨dot⟩){⟨text⟩}
```

The point can either be given by its coordinates or by its name.


options	default	definition
color	black	current colour
text	black	text colour
fill	white	background colour
opacity	1	opacity

16.1.1 A title

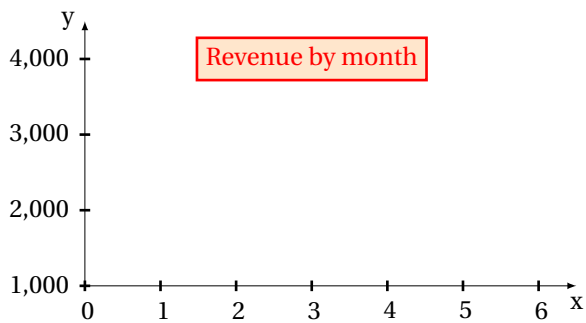

```
\begin{tikzpicture}
  \tkzInit[xmax = 6, ymin = 1000,%
    ymax = 4000,ystep = 1000]
  \tkzAxeXY
  \tkzText[draw,
    line width = 1pt,%
    color = red,%
    fill = orange!20](3,4000){
    Revenue by month}
\end{tikzpicture}
```


16.1.2 Draft

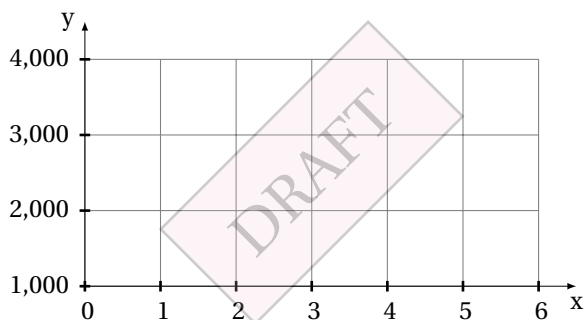

```
\begin{tikzpicture}
  \tkzInit[xmax = 6, ymin = 1000,%
    ymax = 4000,ystep = 1000]
  \tkzGrid \tkzAxeXY
  \tkzText[draw,opacity=.2,
    rotate=45,inner sep=.6 cm,
    line width = 1pt,
    color = black,
    fill = purple!20](3,2500)
    {\Huge DRAFT}
\end{tikzpicture}
```

16.1.3 Text with a point


It is possible to give the reference of a point instead of its coordinates.

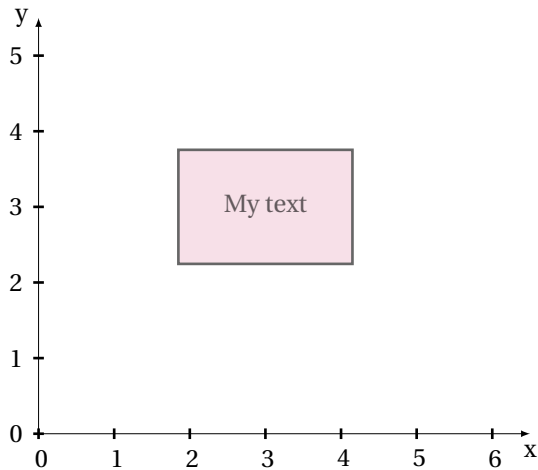

```
\begin{tikzpicture}
\tkzInit[ymax=5,xmax=6]
\tkzAxeXY
\tkzDefPoint(3,3){A}
\tkzText[draw,opacity=.6,
         inner sep=.6 cm,
         line width = 1pt,
         color      = black,
         fill = purple!20](A)
         {My text}
\end{tikzpicture}
```

16.1.4 Text format

The option `text width` is interesting, see the pgfmanual for more information.

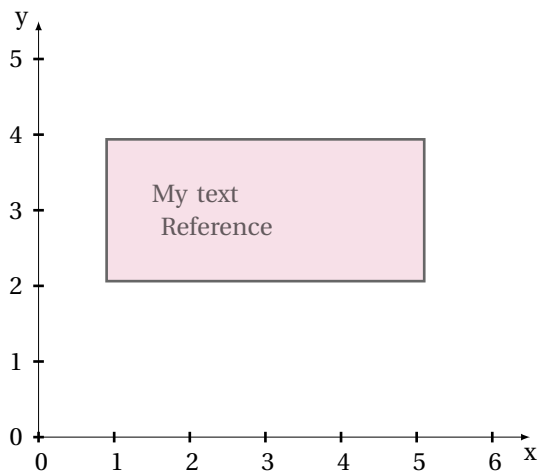

```
\begin{tikzpicture}
\tkzInit[ymax=5,xmax=6]
\tkzAxeXY
\tkzText[draw,opacity=.6,
         inner sep=.6 cm,
         line width = 1pt,
         color      = black,
         fill = purple!20,
         text width=3cm](3,3)
         {My text\\ Reference}
\end{tikzpicture}
```

16.2 Placing legends

There are two ways to use this macro. Either you can place legends for curves. Then you can represent lines with their own style, or you can differentiate symbols (mark).

```
\tkzLegend[⟨local options⟩]{⟨mark/color/size/text⟩}
```

The arguments differ according to the boolean `line`.

options	default	definition
<code>line</code>	<code>false</code>	Boolean: line or symbol


With `line=true`

arguments	default	example
<code>style/line width/color/text</code>	<code>no default</code>	<code>dashed/1pt/red/Product Recipe B</code>

With `line=false`

arguments	default	example
mark/mark size/color/text	no default	heart/1ex/red!30/Product Recipe A

16.2.1 Legends with symbols

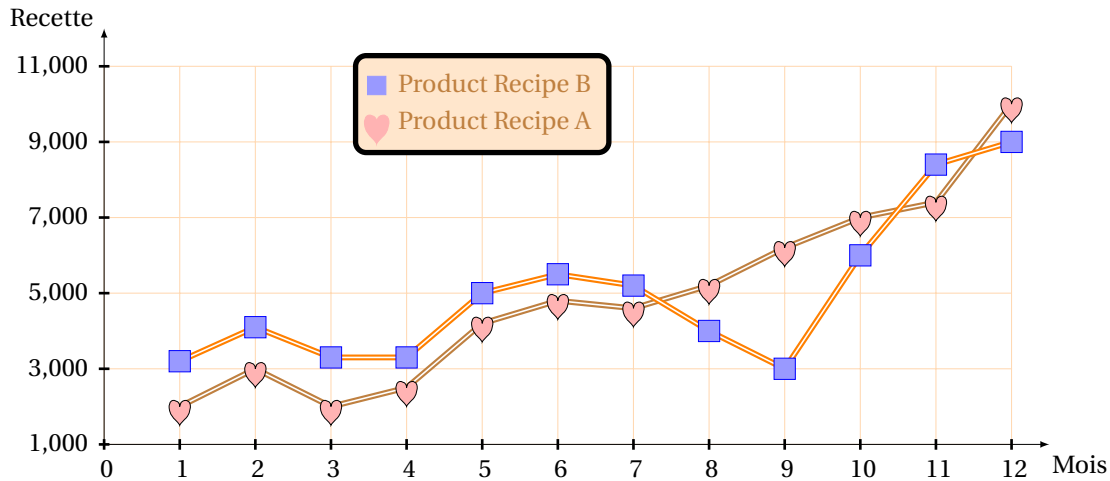

```

\begin{tikzpicture}
\tkzInit[xmax=12,ymin=1000,ymax=11000,ystep=2000]
\tkzGrid[color=orange!30]
\tkzDrawX[below right,label=Mois]
\tkzDrawY[above left,label=Recette]
\tkzLabelX
\tkzLabelY
\tkzDefSetOfPoints{1/2000,2/3000,3/2000,4/2500,5/4200,6/4800,7/4600,
8/5200,9/6200,10/7000,11/7400,12/10000}
\tkzDefSetOfPoints[prefix=P]{1/3200,2/4100,3/3300,4/3300,5/5000,6/5500,7/5200,8/4000,
9/3000,10/6000,11/8400,12/9000}
\tkzSetUpMark[mark=heart,color=black,fill=red!30,size=4pt]
\tkzJoinSetOfPoints[thick,color=brown,double]
\tkzDrawSetOfPoints
\tkzJoinSetOfPoints[prefix=P,thick,color=orange,double]
\tkzDrawSetOfPoints[prefix=P,mark=square*,mark size=4pt,
mark options={color=blue,fill=blue!40}]
\tkzLegend[draw,rounded corners,fill=orange!20,text=brown,
line width=2pt](5,10000){heart/1ex/red!30/Product Recipe A,%
square*/0.75ex/blue!40/Product Recipe B}
\end{tikzpicture}

```

17 FAQ

17.1 General Questions

- **Why tkz-base ?** As a Mathematics teacher, I needed tools that would allow me to write my lessons and exercises quickly. TikZ was perfect for that, but I was wasting too much time on details. I wanted to create a syntax that was both close to that of \LaTeX and `math` so I could memorize better. So I created a module for each branch of mathematics I taught. `tkz-base` is the common part of all these modules. `tkz-euclide` and `tkz-berge` are the ones I invested the most in.
- **Relationship with TikZ?** TikZ is a great package for describing drawings. My packages are based on it. That said, it is in no way comparable. My packages are only useful for people who want to create mathematical figures.

17.2 Most common errors

- **Error unknown option: "label options"**. This option is no longer available. You can now directly use the options in TikZ.
- **Error with `\tkzDrawPoint` or `\tkzDefPoint` `\tkzDrawPoint(A,B)` when you need `\tkzDrawPoints`.** This is true with all macros that allow you to define multiple objects. The singular form allows you to use custom options. On the other hand, it is possible to use the plural form for a single object.
- **Propagation of a style** It is possible to restrict the propagation of a style by placing a piece of code in a group or in a `scope` environment or between parentheses.
- **The use of the comma** even in a Mathematical mode $\$2.5\$$ needs to be protected in a TeX group, for example `\$2,5\$`.
- `\tkzDrawSegments{B,B' C,C'}` is a mistake. Only macros that define an object use braces.
- If an error occurs in a calculation when passing parameters, then it is better to make these calculations before calling the macro.
- Do not mix the syntax of `pgfmath` and `xfp`.

Index

`\below=10pt`, 20

Environment

scope, 30

Operating System

Windows, 8

Package

autolanguage, 9

fp, 7, 9

numprint, 9

pgf, 9

pgfmath, 30, 60

siunitx, 9

tkz-base, 9–11, 43, 60

tkz-berge, 60

tkz-euclide, 7, 43, 60

tkz-fct, 7, 10

xfp, 7–9, 29, 30, 60

`\pgfresetboundingbox`, 43

TeX Distributions

MiKTeX, 8

TeXLive, 8

`\textstyle`, 23

TikZ Library

angles, 7

babel, 9

quotes, 7

`\tikzset`, 41

`\tikzstyle`, 41

`\tkzAutoLabelPoints`, 36, 37

`\tkzAxeX`, 15, 19–21

`\tkzAxeX`: options

frac, 19

label, 19

swap, 19

trig, 19

`\tkzAxeXY`, 21

`\tkzAxeXY`[(local options)], 21

`\tkzAxeX`[(local options)], 19

`\tkzAxeY`, 21

`\tkzAxeY`[(local options)], 21

`\tkzClip`, 7, 43, 44

`\tkzClip`: options

space, 44

`\tkzClipBB`, 45

`\tkzClip`[(local options)], 44

`\tkzDefPoint`, 29, 30, 34, 53, 60

`\tkzDefPoint`: arguments

a:r, 29

x, y, 29

`\tkzDefPoint`: options

shift, 29

`\tkzDefPoints`{0/0/0,2/2/A}, 31

`\tkzDefPoints`, 31, 40, 53

`\tkzDefPoints`: arguments

$x_i/y_i/n_i$, 31

`\tkzDefPoints`[(local options)]{(x₁/y₁/n₁,x₂/y₂/n₂,...)}, 31

`\tkzDefPoint`[(local options)](x,y){(name)} or (a:r){(name)}, 29

`\tkzDefRandPointOn`, 7

`\tkzDefSetOfPoints`, 40, 53

`\tkzDefSetOfPoints`: arguments

x_n/y_n , 40

`\tkzDefSetOfPoints`: options

prefix, 40

`\tkzDefSetOfPoints`[(local options)]{(x₁/y₁,x₂/y₂,...,x_n/y_n)}, 40

`\tkzDefShiftPoint`, 31

`\tkzDefShiftPoint`: arguments

(a:r), 31

(x, y), 31

point, 31

`\tkzDefShiftPointCoord`, 32

`\tkzDefShiftPointCoord`: arguments

(a:r), 32

(x, y), 32

`\tkzDefShiftPointCoord`: options

a, b, 32

`\tkzDefShiftPointCoord`[(a,b)](x,y){(name)} or (a:r){(name)}, 32

`\tkzDefShiftPoint`[(Point)](x,y){(name)} or (a:r){(name)}, 31

`\tkzDrawMark`, 53, 55

`\tkzDrawMark`: options

prefix, 55

`\tkzDrawMarks`, 55, 56

`\tkzDrawMarks`: options

prefix, 56

`\tkzDrawMarks`[(local options)]((list of points)), 55

`\tkzDrawMark`[(local options)]((point)), 55

`\tkzDrawPoint`(A,B), 60

`\tkzDrawPoint`, 33, 60

`\tkzDrawPoint`: arguments

point, 33

`\tkzDrawPoint`: options

color, 33

shape, 33

size, 33

`\tkzDrawPoints`(A,B,C), 34

`\tkzDrawPoints`, 34, 60

`\tkzDrawPoints`: arguments

points list, 34

`\tkzDrawPoints`[(local options)]((liste)), 34

`\tkzDrawPoint`[(local options)]((point)), 33

`\tkzDrawSegments`{B,B' C,C'}, 60

`\tkzDrawSetOfPoints`, 53

`\tkzDrawSetOfPoints`: options

prefix, 53

`\tkzDrawSetOfPoints`[(local options)], 53

`\tkzDrawX`, 15, 19, 21, 22

- \tkzDrawX: options
 - color, 15
 - label, 15
 - left space, 15
 - noticks, 15
 - right space, 15
 - tickdn, 15
 - tickup, 15
 - tickwd, 15
 - trig, 15
- \tkzDrawXY, 18, 22
- \tkzDrawXY[*(local options)*], 22
- \tkzDrawX[*(local options)*], 15
- \tkzDrawY, 20–22
- \tkzDrawY: options
 - color, 21
 - down space, 21
 - label, 21
 - noticks, 21
 - ticklt, 21
 - tickrt, 21
 - tickwd, 21
 - trig, 21
 - up space, 21
- \tkzDrawY[*(local options)*], 20
- \tkzGetPoint, 7
- \tkzGetRandPointOn, 7
- \tkzGrid, 25, 27, 28
- \tkzGrid: arguments
 - $(x_A ; y_A)$ $(x_B ; y_B)$, 25
- \tkzGrid: options
 - color, 25
 - line width, 25
 - substep, 25
 - substep, 25
 - sub, 25
- \tkzGrid[*(local options)*]($x_A ; y_A$) ($x_B ; y_B$), 25
- \tkzHLine{1}, 48
- \tkzHLine, 48
- \tkzHLine: arguments
 - decimal number, 48
- \tkzHLine: options
 - color, 48
 - line width, 48
 - style, 48
- \tkzHLines{1,4}, 49
- \tkzHLines, 49
- \tkzHLines: arguments
 - list of values, 49
- \tkzHLines[*(local options)*]{*(list of values)*}, 49
- \tkzHLine[*(local options)*]{*(decimal number)*}, 48
- \tkzHTick{1}, 51
- \tkzHTick, 50, 51
- \tkzHTick: arguments
 - decimal number, 51
- \tkzHTick: options
 - mark options, 51
 - mark size, 51
 - mark, 51
- \tkzHTicks{1}, 51
- \tkzHTicks, 51
- \tkzHTicks: arguments
 - decimal number, 51
- \tkzHTicks[*(local options)*]{*(list of numbers)*}, 51
- \tkzHTick[*(local options)*]{*(decimal number)*}, 51
- \tkzInit, 7, 11, 12, 43
- \tkzInit: options
 - xmax, 11, 43
 - xmin, 11, 43
 - xstep, 11, 43
 - ymax, 11, 43
 - ymin, 11, 43
 - ystep, 11, 43
- \tkzInit[*(local options)*], 11, 43
- \tkzJoinSetOfPoints, 53, 54
- \tkzJoinSetOfPoints: options
 - prefix, 53
- \tkzJoinSetOfPoints[*(local options)*], 53
- \tkzLabelLine, 7
- \tkzLabelPoint(A){ A_1 }, 35
- \tkzLabelPoint(A,B,C), 36
- \tkzLabelPoint, 29, 35
- \tkzLabelPoint: arguments
 - point, 35
- \tkzLabelPoint: options
 - TikZ options, 35
- \tkzLabelPoints(A,B,C), 36
- \tkzLabelPoints, 36
- \tkzLabelPoints: arguments
 - list of points, 36
- \tkzLabelPoints: options
 - center, 36
 - dist, 36
- \tkzLabelPoints[*(local options)*](A_1, A_2, \dots), 36
- \tkzLabelPoint[*(local options)*](*(point)*){*(label)*}, 35
- \tkzLabelX, 15, 16, 18, 19, 21, 23
- \tkzLabelX: options
 - color, 16
 - font, 16
 - frac, 16
 - np off, 16
 - orig, 16
 - step, 16
 - trig, 16
- \tkzLabelXY, 23
- \tkzLabelXY[*(local options)*], 23
- \tkzLabelX[*(local options)*], 16
- \tkzLabelY, 18, 21, 23
- \tkzLabelY: options
 - color, 21
 - font, 21
 - frac, 21
 - step, 21
- \tkzLabelY[*(local options)*], 21
- \tkzLegend, 58

`\tkzLegend`: arguments
 mark/mark size/color/text, 59
 style/line width/color/text, 58
`\tkzLegend`: options
 line, 58
`\tkzLegend[local options]{mark/color/size/text}`,
 58
`\tkzPointShowCoord`, 39, 40
`\tkzPointShowCoord`: arguments
 (*ref*), 39
`\tkzPointShowCoord`: options
 noxdraw, 39
 noydraw, 39
 xlabel, 39
 xstyle, 39
 ylabel, 39
 ystyle, 39
`\tkzPointShowCoord[local options](point)`, 39
`\tkzRep`, 47
`\tkzRep`: options
 colorlabel, 47
 color, 47
 line width, 47
 posxlabel, 47
 posylabel, 47
 xlabel, 47
 xnorm, 47
 ylabel, 47
 ynorm, 47
`\tkzRep[local options]`, 47
`\tkzSetOfPoints`, 40, 53
`\tkzSetUpAxis`, 23, 24
`\tkzSetUpAxis`: options
 font, 23
 line width, 23
 ticka, 23
 tickb, 23
 tickwd, 23
`\tkzSetUpAxis[local options]`, 23
`\tkzSetUpMark[mark=heart]`, 54
`\tkzSetUpMark`, 54
`\tkzSetUpMark`: options
 mark, 54
`\tkzSetUpMark[local options]`, 54
`\tkzSetUpPoint`, 37, 38
`\tkzSetUpPoint`: options
 color, 37
 fill, 37
 shape, 37
 size, 37
`\tkzSetUpPoint[local options]`, 37
`\tkzShowBB`, 45
`\tkzShowBB[local options]`, 45
`\tkzText`, 57
`\tkzText`: options
 color, 57
 fill, 57
 opacity, 57
 text, 57
`\tkzText[local options](dot){text}`, 57
`\tkzVLine{1}`, 49
`\tkzVLine`, 49
`\tkzVLine`: arguments
 decimal number, 49
`\tkzVLine`: options
 color, 49
 line width, 49
 style, 49
`\tkzVLines{1,4}`, 50
`\tkzVLines`, 50
`\tkzVLines`: arguments
 list of values, 50
`\tkzVLines[local options]{list of values}`, 50
`\tkzVLine[local options]{decimal number}`, 49
`\tkzVTick{1}`, 51
`\tkzVTick`, 51
`\tkzVTick`: arguments
 decimal number, 51
`\tkzVTicks{1,3}`, 52
`\tkzVTicks`, 51, 52
`\tkzVTicks`: arguments
 decimal number, 52
`\tkzVTicks[local options]{decimal number}`, 52
`\tkzVTick[local options]{decimal number}`, 51

`\useasboundingbox`, 43
`\usepackage[english]{babel}`, 13
`\usetikzlibrary{babel}`, 9
`\usetikztool`, 7

`\xstep`, 43

`\ystep`, 43